LUXEON FX2-L Plus CW

Optical Rayset Readme

July 23rd, 2020

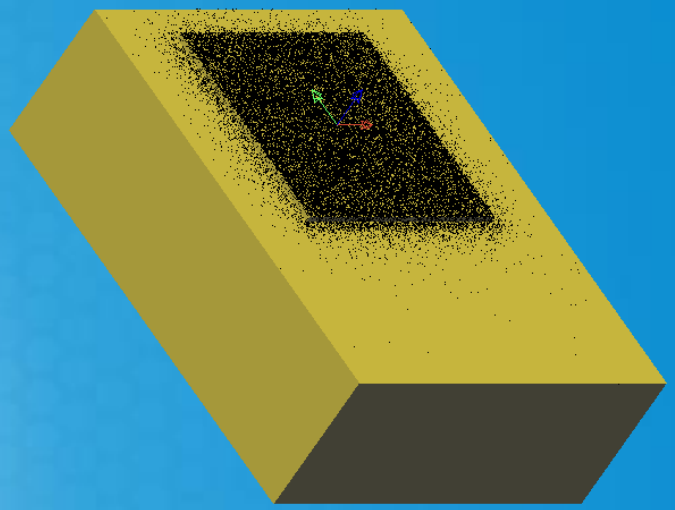

LUMILEDS

LUXEON FX2-L Plus CW

Coordinate system

Top view

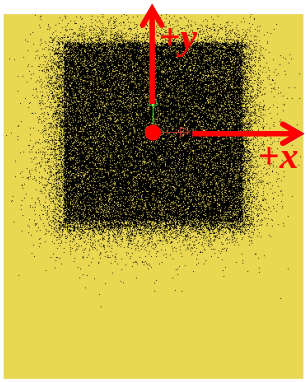

Side view

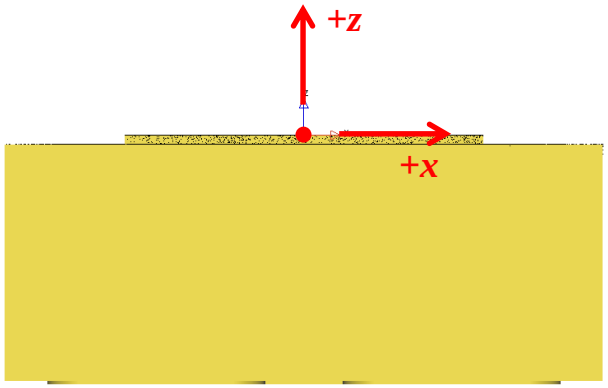

CAD file and rayset files share <u>the same</u> coordinate system, the origin is marked by the red dot in the sketches above:

xy center == center of light emitting area

z=0 plane == top edge of light emitting area

©2020 Lumileds Holding B.V.

LUXEON FX2-L Plus CW

Source size

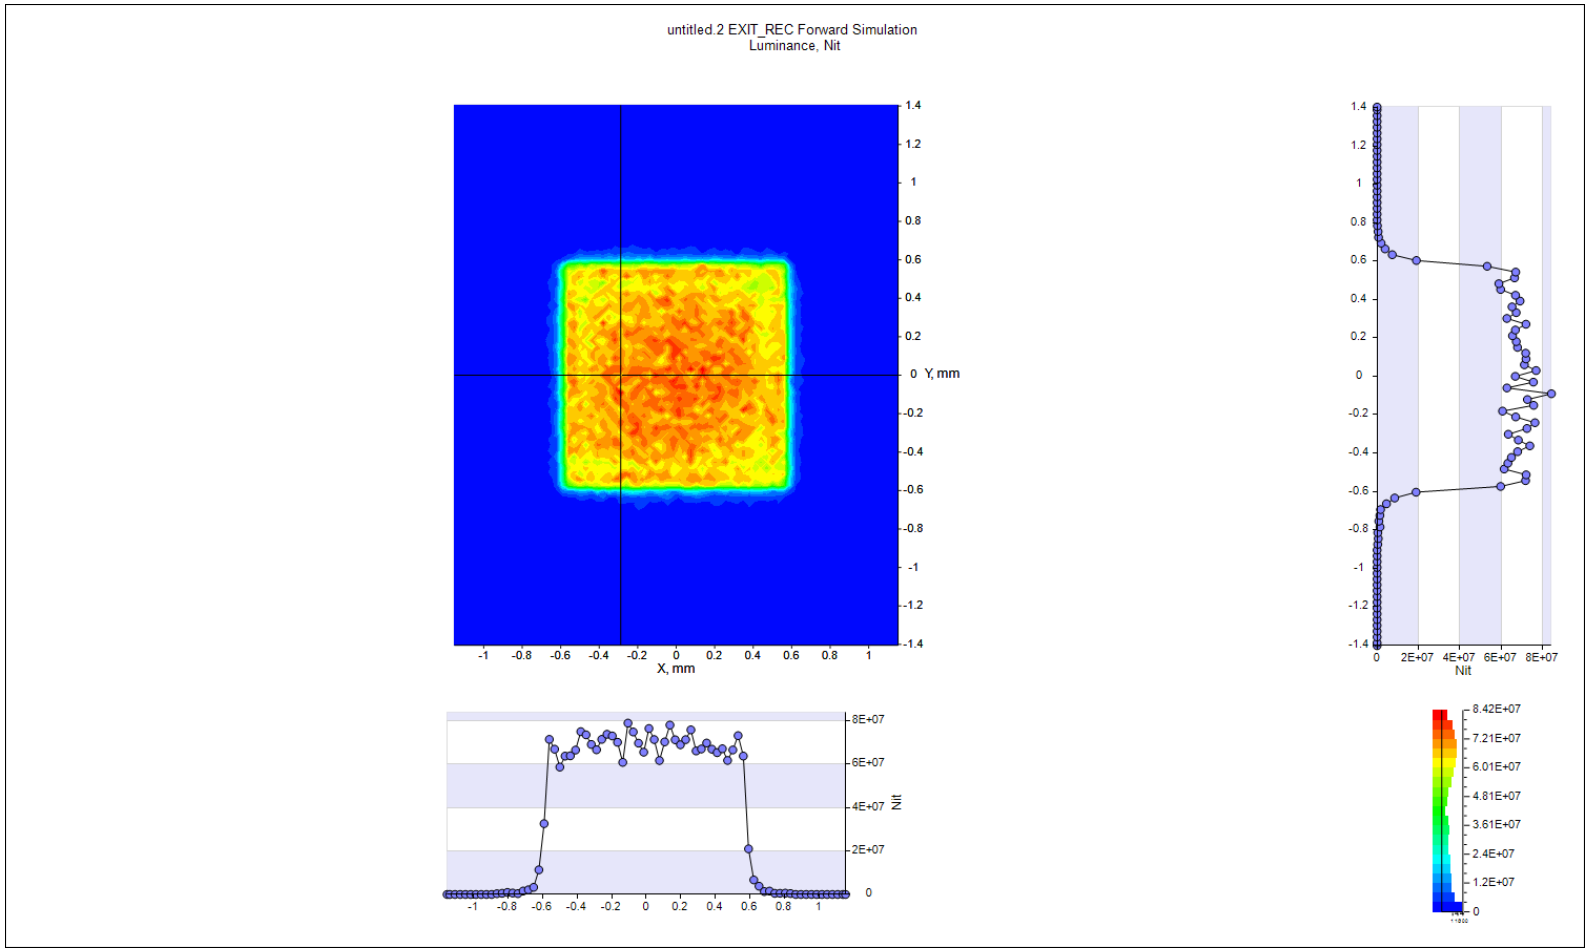

Source luminance (FWHM) = 1.18 x 1.17 mm²

The two orthogonal lines in the luminance image mark the reference planes of the two luminance cross sections.

©2020 Lumileds Holding B.V.

LUXEON FX2-L Plus CW

Luminous intensity distribution

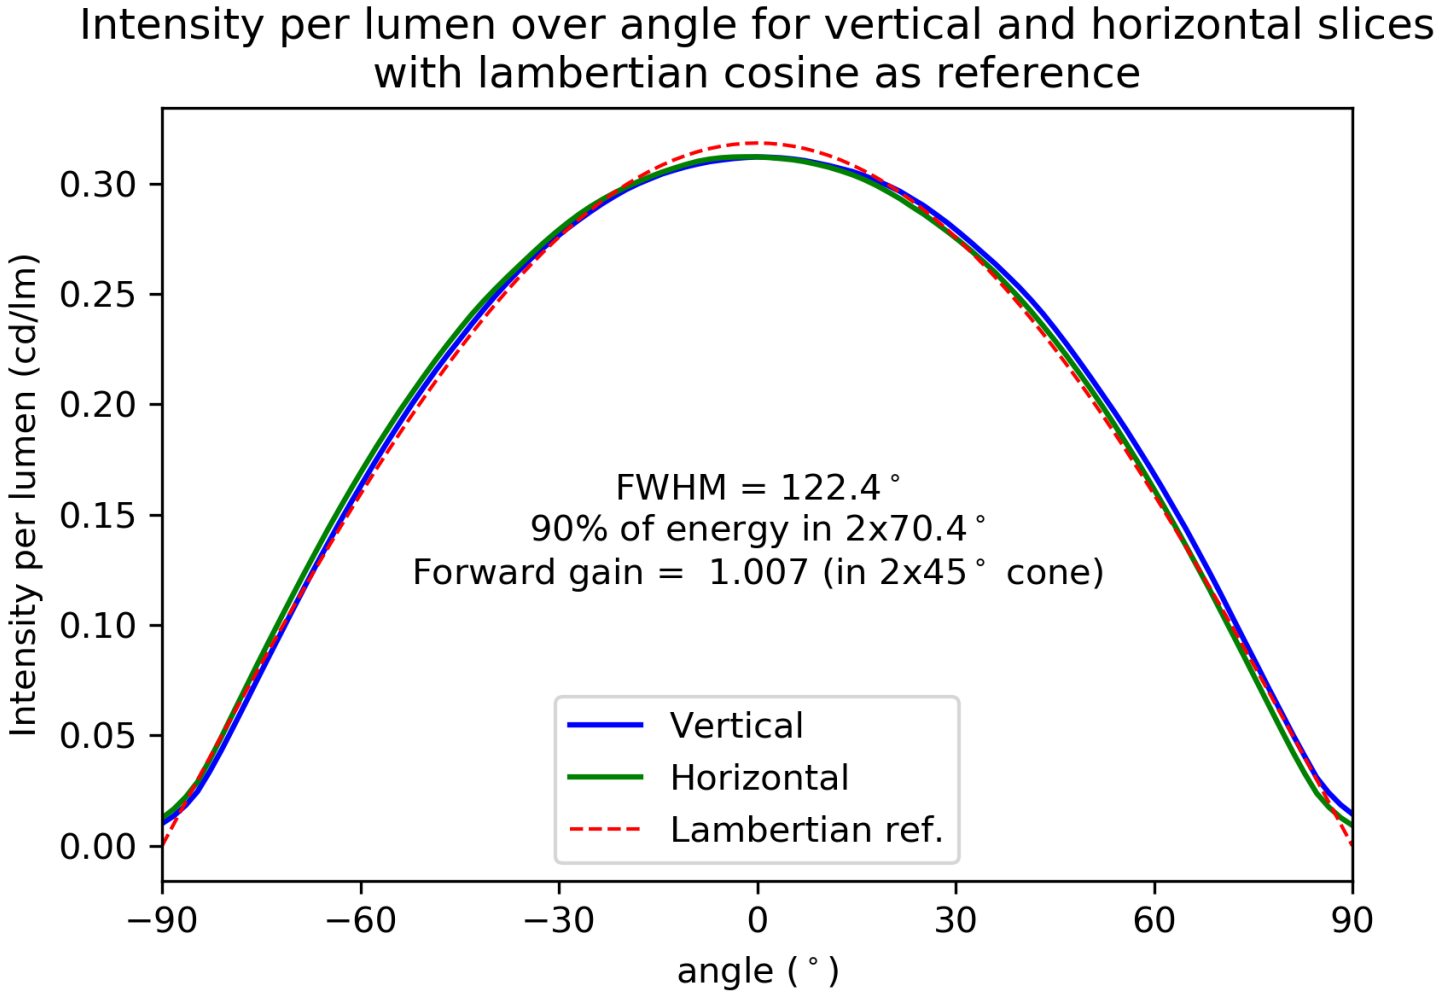

©2020 Lumileds Holding B.V.

Download File Nomenclature (see next slide)

Example

LUXEON_Altilon_SMD2_1x4_gen4plus_20190206_20Mray_proj_Z_spectral_LT.ray

Product Name

Reference Date
helps identifying underlying dataset

Number of rays
e.g. 20 M = 20 · 10^6 rays

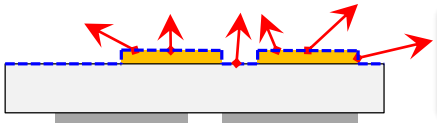

Ray starting points
'proj' indicates that ray starting points have been **projected** onto the CAD surface (---).



Spectral range

$$\begin{Bmatrix} \mathrm{Y} \\ \mathrm{Z} \\ - \end{Bmatrix} = \begin{Bmatrix} \text{only yellow} \\ \text{only blue} \\ \text{full} \end{Bmatrix} \text{ spectrum taken into account}$$

Spectral Information

$$\begin{Bmatrix} \text{spectral} \\ - \end{Bmatrix} = \text{individual rays } \begin{Bmatrix} \text{do} \\ \text{don't} \end{Bmatrix} \text{ carry wavelength information}$$

Target Software Package
LightTools (LT), ASAP, Zemax, …

File Extension

©2020 Lumileds Holding B.V.

Additional Application Notes

Randomization

In some cases, reducing the number of rays in a rayset might be desirable. In order to facilitate the generation of reduced raysets, **all raysets mentioned in this readme file are randomized**. Hence, a rayset having 5 million rays (5M) can simply be generated by taking the first 5M rays from 20M rayset.

Projected Raysets: Propagated ray starting points

For projected raysets, the following procedure is applied for obtaining the starting points:

(1) Project rays on CAD surface (----) → ray starting points

(2) Propagate rays by 0.5 µm → propagated starting points (•)

All raysets mentioned in this readme file provide propagated starting points.

If raytracing includes the LED CAD, unpropagated rays are prone to be blocked at the surface. Rays with propagated starting points should not suffer from this problem.

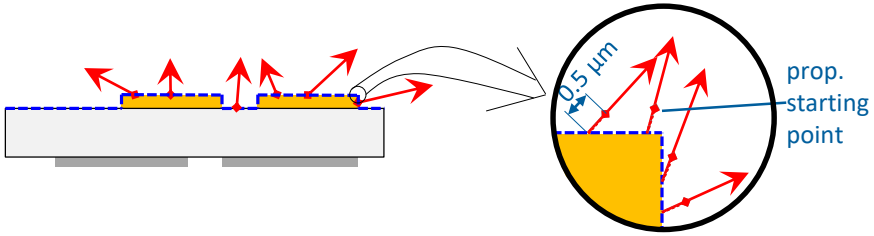

©2020 Lumileds Holding B.V.

LUXEON FX2-L Plus CW

Link to download folder

https://raysets.lumileds.com/index.php/s/8F4sjpMqQMqQosn

Files available for download

Prosource

RS8	LUXEON_FX2_L_Plus_CW_20200723_1292.rs8	628 MB	

LightTools

Spectral Projected	LUXEON_FX2_L_Plus_CW_20200723_40MRays_proj_spectral_LT.ray	1.19 GB	40MRays
Y-Component Projected	LUXEON_FX2_L_Plus_CW_20200723_20MRays_proj_Y_LT.ray	533 MB	20MRays
Z-Component Projected	LUXEON_FX2_L_Plus_CW_20200723_20MRays_proj_Z_LT.ray	530 MB	20MRays

ASAP & LucidShape

Y-Component Projected	LUXEON_FX2_L_Plus_CW_20200723_20MRays_proj_Y_ASAP.dis	533 MB	20MRays
Z-Component Projected	LUXEON_FX2_L_Plus_CW_20200723_20MRays_proj_Z_ASAP.dis	530 MB	20MRays

OPTIS SPEOS

Y-Component Spectral Projected	LUXEON_FX2_L_Plus_CW_20200723_20MRays_proj_Y_spectral_Speos.ray	609 MB	20MRays
Z-Component Spectral Projected	LUXEON_FX2_L_Plus_CW_20200723_20MRays_proj_Z_spectral_Speos.ray	606 MB	20MRays

Zemax

Spectral Projected	LUXEON_FX2_L_Plus_CW_20200723_40MRays_proj_spectral_zemax.dat	1.19 GB	40MRays

Far Field

IES	LUXEON_FX2_L_Plus_CW_20200723_40MRays.ies	10.6 kB

Spectrum

Spectrum	LUXEON_FX2_L_Plus_CW_20200723_spectrum.txt	17.4 kB

CAD

STEP	LUXEON_FX2_L_Plus_CW_20200723_geometry.STEP	133 kB
IGES	LUXEON_FX2_L_Plus_CW_20200723_geometry.IGS	107 kB

©2020 Lumileds Holding B.V.

LUXEON FX2-L Plus CW

3D CAD view + ray starting points

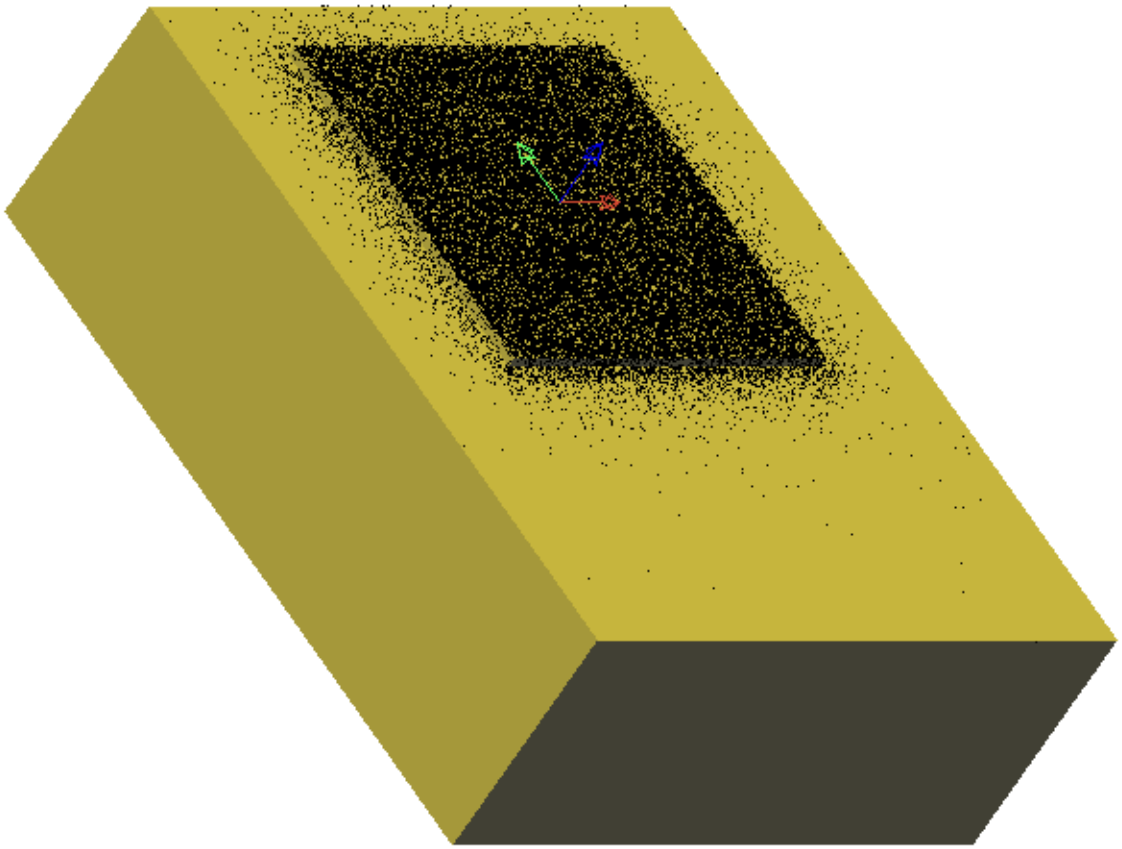

©2020 Lumileds Holding B.V.

LUXEON FX2-L Plus CW

Illuminance color chart (color over position)

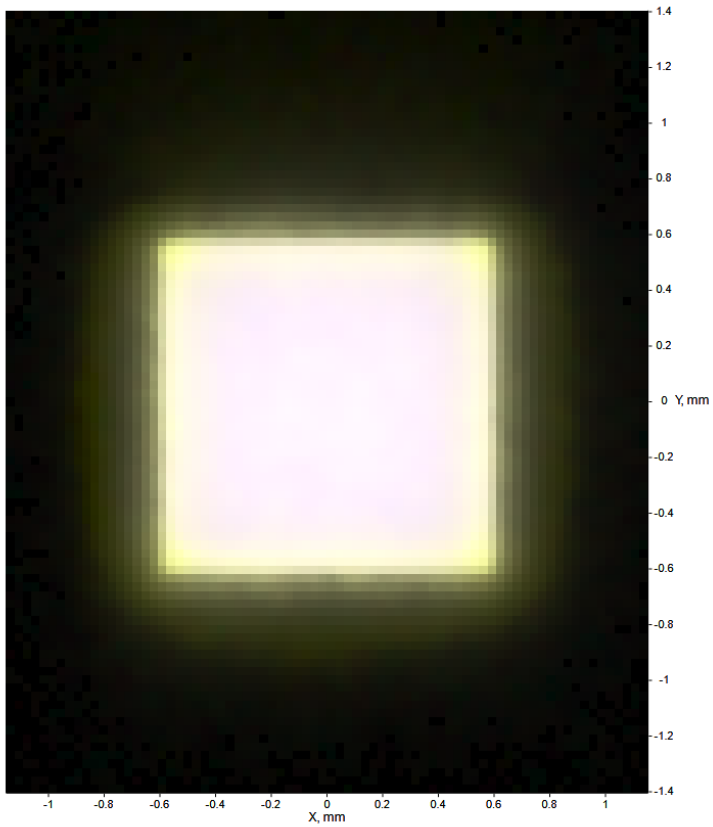

©2020 Lumileds Holding B.V.

LUXEON FX2-L Plus CW

Measured spectrum split in blue (Z) and yellow (Y) components

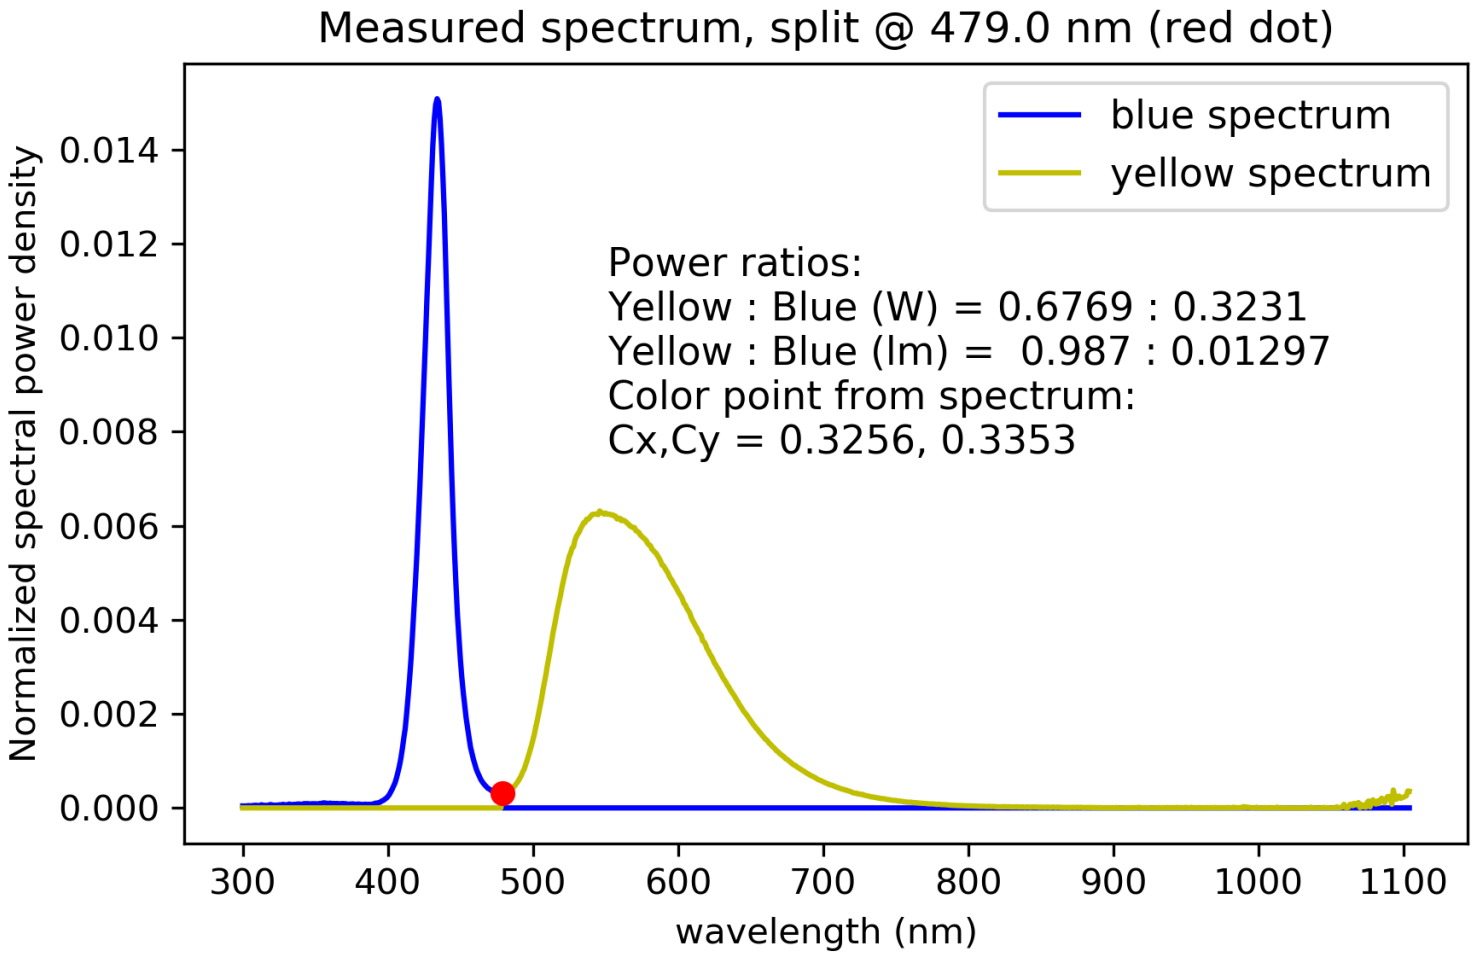

©2020 Lumileds Holding B.V.

LUXEON FX2-L Plus CW

Color data info

Parameter	Value
yellow : blue ratio (W) (from measured spectrum)	0.6769 : 0.3231
yellow : blue ratio (lm) (from measured spectrum)	0.987 : 0.01297
Average color point Cx, Cy (from measured spectrum)	0.3256, 0.3353
Average color point Cx, Cy (from simulation)	0.3254, 0.337
Color point Cx, Cy @ HV (from simulation)	0.3172, 0.3212
Average CCT (K) (from simulation)	5.824e+03

©2020 Lumileds Holding B.V.

Lumileds ref.: 1292_LUXEON FX2-L Plus CW_20200723

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided “as is,” and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the use of the provided materials, information and data. A listing of Lumileds product/patent coverage may be accessed at lumileds.com/patents.

© 2020 Lumileds Holding B.V. All rights reserved.