





TEST REPORT IEC TR 62778 Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires	
Report Number.....	6150077.51P
Date of issue.....	2024-01-31
Total number of pages	41
Name of Testing Laboratory preparing the Report	DEKRA Testing and Certification (Shanghai) Ltd. 3/F, #250, Jiangchangsan Road building 16 Headquater Economy Park Shibe Hi-Tech Park, Jing'an District, Shanghai, P.R.C 200436
Applicant's name	Lumileds (Shanghai) Management Co., Ltd.
Address.....	Building 1-A, No. 19 & 20, Lane 299, Wenshui Road, Jing'an District, Shanghai, 200072, China
Test specification:	
Standard	IEC TR 62778:2014 (Second Edition)
Test procedure	Type test
Non-standard test method	N/A
Test Report Form No.	IEC62778A
Test Report Form(s) Originator	TÜV SÜD Product Service GmbH
Master TRF	Dated 2016-02
Copyright © 2016 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report. The purpose of this report is only for export activities.	

Test item description :	Integral LED module	
Trade Mark :	LUMILEDS	
Manufacturer	Lumileds (Shanghai) Management Co., Ltd. Building 1-A, No. 19 & 20, Lane 299, Wenshui Road, Jing'an District, Shanghai, 200072, China	
Model/Type reference	L2C6-AABBCDEEFGGHH (For details see Model list)	
Ratings	For details see Model list	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	DEKRA Testing and Certification (Shanghai) Ltd.
Testing location/ address		3/F, #250, Jiangchangsan Road building 16 Headquarter Economy Park Shibe Hi-Tech Park, Jing'an District, Shanghai, P.R.C 200436
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address		
Tested by (name, function, signature)		Nancy Wang 
Approved by (name, function, signature) ..		Hanson Zhang 
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	
Testing location/ address		
Tested by (name, function, signature)		
Approved by (name, function, signature)		
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	
Testing location/ address		
Tested by (name + signature)		
Witnessed by (name, function, signature)		
Approved by (name, function, signature)		
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	
Testing location/ address		
Tested by (name, function, signature)		

Witnessed by (name, function, signature)		
Approved by (name, function, signature)		
Supervised by (name, function, signature)		

List of Attachments (including a total number of pages in each attachment):

- Appendix 1: Photo Documentation
- Appendix 2: Model List
- Appendix 3: Relative Spectrum Of Tested Sample(s)
- Appendix 4: Table 6.1 Based On IEC 62471:2006
- Appendix 5: Table 6.1 Based On EN62471:2008, Attachment To IEC 62471 European Group Differences And National Differences
- Appendix 6: Blue Light Hazard-Forward Current Relationship (Non-mandatory Information)

Summary of testing:**Tests performed (name of test and test clause):**

These tests fulfil the requirements of standard ISO/IEC 17025.

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

The tested sample of

L2C6-50902L02A0600

Has been tested according to the IEC 62471(first edition, 2006-07) **at 200mm** and been classified as **RG 2 at 450mA** and **RG1 at 170mA**

Have been tested according to the EN 62471:2008 **at 200mm** and been classified as **RG 2 at 450mA** and **RG1 at 170mA**

Have been tested according to the IEC/TR 62778:2014 and been classified as **RG 2 at 450mA** and **RG1 Unlimited at 170mA for blue light hazard**.

The tested sample of

L2C6-50902L02C0600

Has been tested according to the IEC 62471(first edition, 2006-07) **at 200mm** and been classified as **RG 2 at 450mA** and **RG1 at 162mA**.

Have been tested according to the EN 62471:2008 **at 200mm** and been classified as **RG 2 at 450mA** and **RG1 at 162mA**.

Have been tested according to the IEC/TR 62778:2014 and been classified as **RG 2 at 450mA** and **RG1 Unlimited at 162mA for blue light hazard**.

Testing location:

DEKRA Testing and Certification (Shanghai) Ltd.
3/F, #250, Jiangchangsan Road building 16
Headquater Economy Park Shibe Hi-Tech Park,
Jing'an District, Shanghai, P.R.C 200436

Summary of compliance with National Differences (List of countries addressed): EN Standards

EN 62471:2008

The product fulfills the requirements

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

N/A

Test item particulars: See below	
Product evaluated:	<input type="checkbox"/> LED package <input checked="" type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire
Rated voltage (V)	40 Vdc
Rated current (mA)	450 – 3600 mA max current
Rated CCT (K):	--
Rated Luminance (Mcd/m²)	--
Component report data used	<input checked="" type="checkbox"/> Not applicable <input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp Report number: --
Possible test case verdicts:	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
Testing: --	
Date of receipt of test item	2024-01-18
Date (s) of performance of tests	2024-01-31
General remarks:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>The product complied with the following standards:</p> <input checked="" type="checkbox"/> IEC 62471:2006 <input checked="" type="checkbox"/> EN 62471:2008 <input type="checkbox"/> IEC/TR 62471-2:2009 <input checked="" type="checkbox"/> IEC/TR 62778:2014	
Decision rules applied Procedure 2 "Accuracy Method" as stated in the IEC Guide 115:2007.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 62471-2:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies) : Lumileds (Shanghai) Management Co., Ltd
Building 1-A, No. 19 & 20, Lane 299, Wenshui
Road, Jing'an District, Shanghai, 200072, China

General product information:

Full tests were performed on model L2C6-50902L02A0600 and L2C6-50902L02C0600.

The products were considered as worst case which should be evaluated at 200mm.

The sample of L2C6-50902L02A0600 and L2C6-50902L02C0600 was tested at 200mm from the light source.

Base on the Model list which listed on the appendix 2, The tested sample can be considered as
 typical product worst product

Which the results can be reference used for the other models.

Type test was performed according to IEC 62471:2006 procedure.

Amendment 1 report:

The original test report 6150077.50P, dated 2023-02-03 was modified to include the following additions:

- New models L2C6-AABBxDEEFGGxx were added in Model list with bold letters.

After review, full tests were performed on model **L2C6-50902L02C0600**.

IEC TR 62778			
Clause	Requirement + Test	Result - Remark	Verdict
7	MEASUREMENT INFORMATION FLOW		P
7.1	Basic flow		P
	'Law of conservation of luminance' applied		N/A
	Use of only true luminance/radiance values		P
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		N/A
	In case E_{thr} value for RG2 was established the peak value was derived from angular light distribution		N/A
7.2	Conditions for the radiance measurement		P
	Standard condition applied (200mm distance, 0,011rad field of view)		P
	Non-standard condition applied		N/A
7.3	Special cases (I): Replacement by a lamp or LED module of another type		N/A
	Light source is a white light source		N/A
	Evaluation done based on highest luminance		N/A
	Evaluation done based on CCT value		N/A
7.4	Special cases (II): Arrays and clusters of primary light sources		N/A
	LED package is evaluated as : <input type="checkbox"/> RG0 unlimited <input type="checkbox"/> RG1 unlimited		N/A
	E_{thr} of LED package applies to array		N/A
8	RISK GROUP CLASSIFICATION		P
	Risk group achieved:		P
	- .. Risk Group 0 unlimited		N/A
	- .. Risk Group 1 unlimited		N/A
	- E_{thr} (lx) : Distance to reach RG1 (m) :	Refer to the Supplementary information of TABLE: Spectroradiometric measurement as following	P

IEC TR 62778			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE:Spectroradiometric measurement				
Measurement performed on:		<input type="checkbox"/> LED package <input checked="" type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
Model number.....		L2C6-50902L02A0600		
Test voltage (V)		--		—
Test current (mA)		450 mA		—
Test frequency (Hz).....		--		—
Ambient, t(°C)		25°C		—
Measurement distance.....		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		—
Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		—
Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5333	
x/y colour coordinates			0,3369 / 0,3607	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	2,43E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	3,05E+07	@11mrad
Illuminance	E	lx	1,86E+04	
Supplementary information: Per IEC/TR 62778:2014 E _{thr} = 1253 lx D _{min} = 770 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:	<input type="checkbox"/> LED package <input checked="" type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
	Model number	L2C6-50902L02A0600		
	Test voltage (V)	--		—
	Test current (mA)	338 mA		—
	Test frequency (Hz)	--		—
	Ambient, t(°C)	25°C		—
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		—
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		—
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5301	
x/y colour coordinates			0,3378 / 0,3622	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	1,93E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	2,47E+07	@11mrad
Illuminance	E	lx	1,49E+04	
Supplementary information: Per IEC/TR 62778:2014 E _{thr} = 1283 lx D _{min} = 680 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:	<input type="checkbox"/> LED package <input checked="" type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
	Model number	L2C6-50902L02A0600		
	Test voltage (V)	--		—
	Test current (mA)	226 mA		—
	Test frequency (Hz)	--		—
	Ambient, t(°C)	25°C		—
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		—
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		—
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5269	
x/y colour coordinates			0,3387 / 0,3631	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	1,34E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	1,76E+07	@11mrad
Illuminance	E	lx	1,05E+04	
Supplementary information: Per IEC/TR 62778:2014 E _{thr} = 1310 lx D _{min} = 567 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:	<input type="checkbox"/> LED package <input checked="" type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
	Model number	L2C6-50902L02A0600		
	Test voltage (V)	--		—
	Test current (mA)	114 mA		—
	Test frequency (Hz)	--		—
	Ambient, t(°C)	25°C		—
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		—
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		—
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5220	
x/y colour coordinates			0,3401 / 0,3633	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	6,52E+03	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	8,72E+06	@11mrad
Illuminance	E	lx	5,18E+03	
Supplementary information: N/A				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:	<input type="checkbox"/> LED package <input checked="" type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
	Model number	L2C6-50902L02C0600		
	Test voltage (V)	--		—
	Test current (mA)	450 mA		—
	Test frequency (Hz)	--		—
	Ambient, t(°C)	25°C		—
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		—
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		—
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5136	
x/y colour coordinates			0,3428 / 0,3699	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	2,07E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	2,90E+07	@11mrad
Illuminance	E	lx	5,68E+03	
Supplementary information: Per IEC/TR 62778:2014 E _{thr} = 1400 lx D _{min} = 403 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:	<input type="checkbox"/> LED package <input checked="" type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
	Model number	L2C6-50902L02C0600		
	Test voltage (V)	--		—
	Test current (mA)	338 mA		—
	Test frequency (Hz)	--		—
	Ambient, t(°C)	25°C		—
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		—
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		—
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5097	
x/y colour coordinates			0,3434 / 0,3626	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	1,86E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	2,53E+07	@11mrad
Illuminance	E	lx	2,72E+03	
Supplementary information: Per IEC/TR 62778:2014 E _{thr} = 1362 lx D _{min} = 283 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:	<input type="checkbox"/> LED package <input checked="" type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
	Model number	L2C6-50902L02C0600		
	Test voltage (V)	--		—
	Test current (mA)	226 mA		—
	Test frequency (Hz)	--		—
	Ambient, t(°C)	25°C		—
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		—
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		—
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5060	
x/y colour coordinates			0,3447 / 0,3663	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	1,41E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	1,52E+07	@11mrad
Illuminance	E	lx	1,99E+03	
Supplementary information: Per IEC/TR 62778:2014 E _{thr} = 1280 lx D _{min} = 249 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:	<input type="checkbox"/> LED package <input checked="" type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
	Model number	L2C6-50902L02C0600		
	Test voltage (V)	--		—
	Test current (mA)	114 mA		—
	Test frequency (Hz)	--		—
	Ambient, t(°C)	25°C		—
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		—
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		—
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5008	
x/y colour coordinates			0,3464 / 0,3687	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	7,05E+03	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	9,20E+06	@11mrad
Illuminance	E	lx	1,01E+03	
Supplementary information: N/A				

IEC TR 62778			
Clause	Requirement + Test	Result - Remark	Verdict

	TABLE: Angular light distribution	N/A

List of test equipment used:

A completed list of used test equipment shall be provided in the Test Reports when a Manufacturer Testing Laboratory according to CTF stage 1 or CTF stage 2 procedure has been used.

Note: This page may be removed when CTF stage 1 CTF stage 2 are not used. See also clause 4.8 in OD 2020 for more details.

Clause	Measurement / testing	Testing / measuring equipment / material used, (Equipment ID)	Range used	Last Calibration date	Calibration due date
7	Irradiance measurements Radiance measurements	IDR 300 Monochromator (SH 344)	200-3000nm	/	/
7	Radiance measurements	S009 Telescope (SH 345)	300-1400nm	/	/
7	Radiance measurements	SRS 12 Radiance Standard (SH 348)	300-1400nm	2023/2/27	2024/2/26
7	Irradiance measurements	CL6 Spectral irradiance standard (SH 350)	300-3000nm	2023/2/27	2024/2/26
7	Irradiance measurements	CL7 Spectral irradiance standard (SH 351)	200-400nm	2023/2/27	2024/2/26
7	Irradiance measurements	Photometric detector head (SH 359)	380nm-800nm	2023/2/26	2024/2/25
7	Irradiance measurements Radiance measurements	Wattmeter (SH030)	500V,40A	2023/10/10	2024/10/10

Appendix 1: Photo Documentation



L2C6-50902L02A0600



L2C6-50902L02C0600

Appendix 2: Model List

L2C6-AABBCDEEFGGHH

Where

AA – can be any alphanumeric characters, designate nominal ANSI CCT (eg: 22=2200K, 27=2700K, 30=3000K,35=3500K, 40=4000K, 50=5000K, 56=5600K, 57=5700K, 65=6500K)

BB – can be any alphanumeric characters, designates minimum CRI (eg: 90=90CRI, 95=95CRI)

C – can be any alphanumeric characters, designates color target of SDCM (eg: 2=2 SDCM)

D – can be any alphanumeric characters, designates product configuration of series (eg: L=12 series)

EE – can be any alphanumeric characters, designates product configuration of parallel (eg: 02= 2 parallel, 03= 3 parallel, 04= 4 parallel, 05= 5 parallel, 06= 6 parallel ,08= 8 parallel ,10= 10 parallel,11= 11 parallel,12= 12 parallel, 13= 13 parallel, 16= 16 parallel)

F – can be any alphanumeric characters, designates options for product generation (eg: A= Gen1, C= Gen2)

GG – can be any alphanumeric characters, designates light emitting surface(LES)size (eg: 06=6.3mm, 09=9.8mm, 13=13mm, 15=14.5mm, 22=22mm)


HH – can be any alphanumeric characters, designates options for product specification. (eg: 00= On BBL, X0= Core Pro)

Model No	Driver Current (mA)	2700K	3000K	3500K	4000K	5000K
L2C6-AABBCL02A06HH	170	RG1	RG1	RG1	RG1	RG1
	180	RG1	RG1	RG1	RG1	RG2
	450	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL02A09HH	170	RG1	RG1	RG1	RG1	RG1
	180	RG1	RG1	RG1	RG1	RG2
	450	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL03A09HH	255	RG1	RG1	RG1	RG1	RG1
	270	RG1	RG1	RG1	RG1	RG2
	675	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL04A09HH	340	RG1	RG1	RG1	RG1	RG1
	360	RG1	RG1	RG1	RG1	RG2
	900	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL05A13HH	425	RG1	RG1	RG1	RG1	RG1
	450	RG1	RG1	RG1	RG1	RG2
	1125	RG1	RG1	RG2	RG2	RG2


L2C6-AABBCL06A13HH	510	RG1	RG1	RG1	RG1	RG1
	540	RG1	RG1	RG1	RG1	RG2
	1350	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL08A15HH	680	RG1	RG1	RG1	RG1	RG1
	720	RG1	RG1	RG1	RG1	RG2
	1800	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL10A15HH	850	RG1	RG1	RG1	RG1	RG1
	900	RG1	RG1	RG1	RG1	RG2
	2250	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL11A22HH	935	RG1	RG1	RG1	RG1	RG1
	990	RG1	RG1	RG1	RG1	RG2
	2475	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL13A22HH	1105	RG1	RG1	RG1	RG1	RG1
	1170	RG1	RG1	RG1	RG1	RG2
	2925	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL16A22HH	1360	RG1	RG1	RG1	RG1	RG1
	1440	RG1	RG1	RG1	RG1	RG2
	3600	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL02C06HH	162	RG1	RG1	RG1	RG1	RG1
	180	RG1	RG1	RG1	RG1	RG2
	450	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL02C09HH	162	RG1	RG1	RG1	RG1	RG1
	180	RG1	RG1	RG1	RG1	RG2
	450	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL03C09HH	243	RG1	RG1	RG1	RG1	RG1
	270	RG1	RG1	RG1	RG1	RG2
	675	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL04C09HH	324	RG1	RG1	RG1	RG1	RG1
	360	RG1	RG1	RG1	RG1	RG2

	900	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL05C13HH	405	RG1	RG1	RG1	RG1	RG1
	450	RG1	RG1	RG1	RG1	RG2
	1125	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL06C13HH	486	RG1	RG1	RG1	RG1	RG1
	540	RG1	RG1	RG1	RG1	RG2
	1350	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL08C15HH	648	RG1	RG1	RG1	RG1	RG1
	720	RG1	RG1	RG1	RG1	RG2
	1800	RG1	RG1	RG2	RG2	RG2
L2C6-AABBCL10C15HH	810	RG1	RG1	RG1	RG1	RG1
	900	RG1	RG1	RG1	RG1	RG2
	2250	RG1	RG1	RG2	RG2	RG2

Appendix 3: Relative Spectrum Of Tested Sample(s)

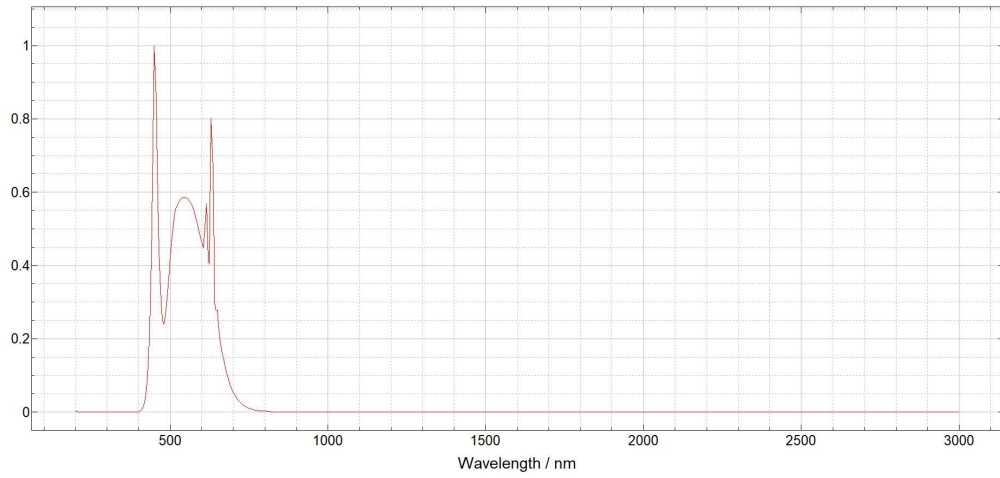

L2C6-50902L02A0600

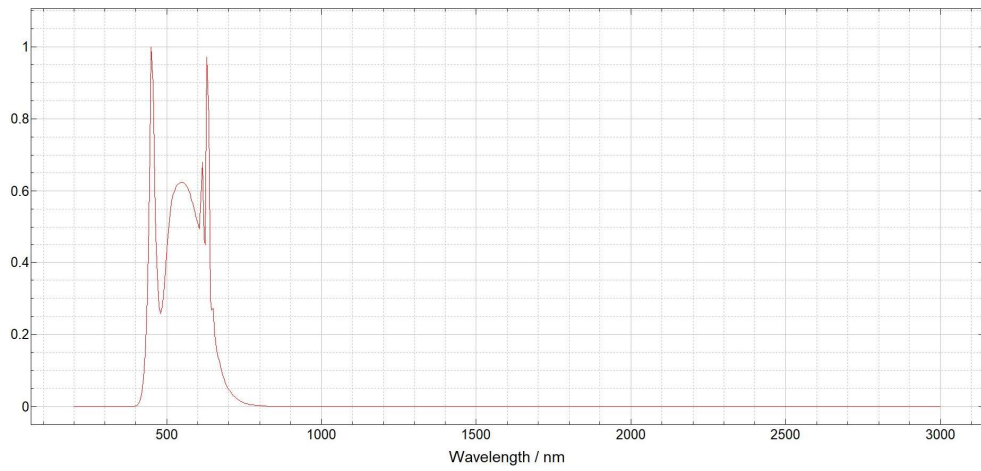

L2C6-50902L02C0600

Appendix 4: Table 6.1 Based On IEC 62471:2006

DUT: L2C6-50902L02A0600, Evaluation Distance: 200mm, Test current: 450mA, Angular subtense of the apparent source α : 32 mrad

IEC 62471									
Clause	Requirement + Test				Result – Remark				Verdict
Table 6.1	Emission limits for risk groups of continuous wave lamps								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	1,54E+03	10000	2,43E+04	4000000	3,00E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	3,01E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	6000/ α	--	6000/ α		6000/ α	
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,15	570		3200	
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.									
** Involves evaluation of non-GLS source									

DUT: L2C6-50902L02A0600, Evaluation Distance: 200mm, Test current: 338mA, Angular subtense of the apparent source α : 32 mrad

IEC 62471									
Clause	Requirement + Test				Result – Remark				Verdict
Table 6.1	Emission limits for risk groups of continuous wave lamps								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	1,21E+03	10000	1,93E+04	4000000	2,04E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	2,40E+05	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,13	570		3200	
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.									
** Involves evaluation of non-GLS source									

DUT: L2C6-50902L02A0600, Evaluation Distance: 200mm, Test current: 226mA, Angular subtense of the apparent source α : 32 mrad

IEC 62471			
Clause	Requirement + Test	Result – Remark	Verdict

Table 6.1 Emission limits for risk groups of continuous wave lamps									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	8,50E+02	10000	1,34E+04	4000000	1,50E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	1,68E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	6000/ α	--	6000/ α		6000/ α	
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,12	570		3200	
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.									
** Involves evaluation of non-GLS source									

DUT: L2C6-50902L02A0600, Evaluation Distance: 200mm, Test current: 114mA, Angular subtense of the apparent source α : 32 mrad

IEC 62471									
Clause	Requirement + Test				Result – Remark				Verdict
Table 6.1	Emission limits for risk groups of continuous wave lamps								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	4,13E+02	10000	6,52E+03	4000000	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	8,20E+04	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	6000/ α	--	6000/ α		6000/ α	
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,10	570		3200	
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.									
** Involves evaluation of non-GLS source									

DUT: L2C6-50902L02C0600, Evaluation Distance: 200mm, Test current: 450mA, Angular subtense of the apparent source α : 32 mrad

IEC 62471									
Clause	Requirement + Test				Result – Remark				Verdict
Table 6.1	Emission limits for risk groups of continuous wave lamps								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	4,45E+02	10000	2,07E+04	4000000	2,83E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	2,62E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	6000/ α	--	6000/ α		6000/ α	
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,10	570		3200	
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.									
** Involves evaluation of non-GLS source									

DUT: L2C6-50902L02C0600, Evaluation Distance: 200mm, Test current: 338mA, Angular subtense of the apparent source α : 32 mrad

IEC 62471									
Clause	Requirement + Test				Result – Remark				Verdict
Table 6.1	Emission limits for risk groups of continuous wave lamps								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	2,19E+02	10000	1,86E+04	4000000	2,00E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	2,33E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	6000/ α	--	6000/ α		6000/ α	
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,03	570		3200	
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.									
** Involves evaluation of non-GLS source									

DUT: L2C6-50902L02C0600, Evaluation Distance: 200mm, Test current: 226mA, Angular subtense of the apparent source α : 32 mrad

IEC 62471									
Clause	Requirement + Test				Result – Remark				Verdict
Table 6.1	Emission limits for risk groups of continuous wave lamps								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	1,55E+02	10000	1,41E+04	4000000	1,52E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	1,75E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	6000/ α	--	6000/ α		6000/ α	
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,03	570		3200	
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.									
** Involves evaluation of non-GLS source									

DUT: L2C6-50902L02C0600, Evaluation Distance: 200mm, Test current: 114mA, Angular subtense of the apparent source α : 32 mrad

IEC 62471			
Clause	Requirement + Test	Result – Remark	Verdict

Table 6.1 Emission limits for risk groups of continuous wave lamps									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	7,59E+01	10000		4000000	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	8,77E+04	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	6000/ α	--	6000/ α		6000/ α	
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,03	570		3200	
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.									
** Involves evaluation of non-GLS source									

Appendix 5: Table 6.1 Based On EN62471:2008, Attachment To IEC 62471 European Group Differences And National Differences
 DUT: L2C6-50902L02A0600, Evaluation Distance: 200mm, Test current: 450mA, Angular subtense of the apparent source α : 32 mrad

EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	
Table 6.1	Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	1,54E+03	10000	2,43E+04	4000000	3,00E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	3,01E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 0,0017 $\leq \alpha \leq$ 0,011	--				
				6000/ α 0,011 $\leq \alpha \leq$ 0,1	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,15	570		3200	
<p>* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source NOTE The action functions: see Table 4.1 and Table 4.2 The applicable aperture diameters: see 4.2.1 The limitations for the angular subtenses: see 4.2.2 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.</p>									

DUT: L2C6-50902L02A0600, Evaluation Distance: 200mm, Test current: 338mA, Angular subtense of the apparent source α : 32 mrad

EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	
Table 6.1	Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	1,21E+03	10000	1,93E+04	4000000	2,04E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	2,40E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 0,0017 ≤ α ≤ 0,011	--				
				6000/ α 0,011 ≤ α ≤ 0,1	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,13	570		3200	
<p>* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.</p> <p>** Involves evaluation of non-GLS source</p> <p>NOTE The action functions: see Table 4.1 and Table 4.2 The applicable aperture diameters: see 4.2.1 The limitations for the angular subtenses: see 4.2.2 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.</p>									

DUT: L2C6-50902L02A0600, Evaluation Distance: 200mm, Test current: 226mA, Angular subtense of the apparent source α : 32 mrad

EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	
Table 6.1	Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	8,50E+02	10000	1,34E+04	4000000	1,50E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	1,68E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 0,0017 $\leq \alpha \leq$ 0,011	--				
				6000/ α 0,011 $\leq \alpha \leq$ 0,1	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,12	570		3200	
<p>* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.</p> <p>** Involves evaluation of non-GLS source</p> <p>NOTE The action functions: see Table 4.1 and Table 4.2 The applicable aperture diameters: see 4.2.1 The limitations for the angular subtenses: see 4.2.2 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.</p>									

DUT: L2C6-50902L02A0600, Evaluation Distance: 200mm, Test current: 114mA, Angular subtense of the apparent source α : 32 mrad

EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	
Table 6.1	Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	4,13E+02	10000	6,52E+03	4000000	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	8,20E+04	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 0,0017 $\leq \alpha \leq$ 0,011	--				
				6000/ α 0,011 $\leq \alpha \leq$ 0,1	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,10	570		3200	
<p>* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.</p> <p>** Involves evaluation of non-GLS source</p> <p>NOTE The action functions: see Table 4.1 and Table 4.2 The applicable aperture diameters: see 4.2.1 The limitations for the angular subtenses: see 4.2.2 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.</p>									

DUT: L2C6-50902L02C0600, Evaluation Distance: 200mm, Test current: 450mA, Angular subtense of the apparent source α : 32 mrad

EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	
Table 6.1	Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	4,45E+02	10000	2,07E+04	4000000	2,83E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	2,62E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 0,0017 $\leq \alpha \leq$ 0,011	--				
				6000/ α 0,011 $\leq \alpha \leq$ 0,1	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,10	570		3200	
<p>* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.</p> <p>** Involves evaluation of non-GLS source</p> <p>NOTE The action functions: see Table 4.1 and Table 4.2 The applicable aperture diameters: see 4.2.1 The limitations for the angular subtenses: see 4.2.2 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.</p>									

DUT: L2C6-50902L02C0600, Evaluation Distance: 200mm, Test current: 338mA, Angular subtense of the apparent source α : 32 mrad

EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	
Table 6.1	Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	2,19E+02	10000	1,86E+04	4000000	2,00E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	2,33E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 0,0017 $\leq \alpha \leq$ 0,011	--				
				6000/ α 0,011 $\leq \alpha \leq$ 0,1	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,03	570		3200	
<p>* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.</p> <p>** Involves evaluation of non-GLS source</p> <p>NOTE The action functions: see Table 4.1 and Table 4.2 The applicable aperture diameters: see 4.2.1 The limitations for the angular subtenses: see 4.2.2 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.</p>									

DUT: L2C6-50902L02C0600, Evaluation Distance: 200mm, Test current: 226mA, Angular subtense of the apparent source α : 32 mrad


EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	
Table 6.1	Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	1,55E+02	10000	1,41E+04	4000000	1,52E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	1,75E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 0,0017 $\leq \alpha \leq$ 0,011	--				
				6000/ α 0,011 $\leq \alpha \leq$ 0,1	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,03	570		3200	
<p>* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.</p> <p>** Involves evaluation of non-GLS source</p> <p>NOTE The action functions: see Table 4.1 and Table 4.2 The applicable aperture diameters: see 4.2.1 The limitations for the angular subtenses: see 4.2.2 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.</p>									

DUT: L2C6-50902L02C0600, Evaluation Distance: 200mm, Test current: 114mA, Angular subtense of the apparent source α : 32 mrad


EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	
Table 6.1	Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	7,59E+01	10000		4000000	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	8,77E+04	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 0,0017 ≤ α ≤ 0,011	--				
				6000/ α 0,011 ≤ α ≤ 0,1	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,03	570		3200	
<p>* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source</p> <p>NOTE The action functions: see Table 4.1 and Table 4.2 The applicable aperture diameters: see 4.2.1 The limitations for the angular subtenses: see 4.2.2 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.</p>									

Appendix 6: Blue Light Hazard-Forward Current Relationship (Non-mandatory Information)

The diagram below shows the different blue light hazards against different forward currents. It is additional information for reference only.

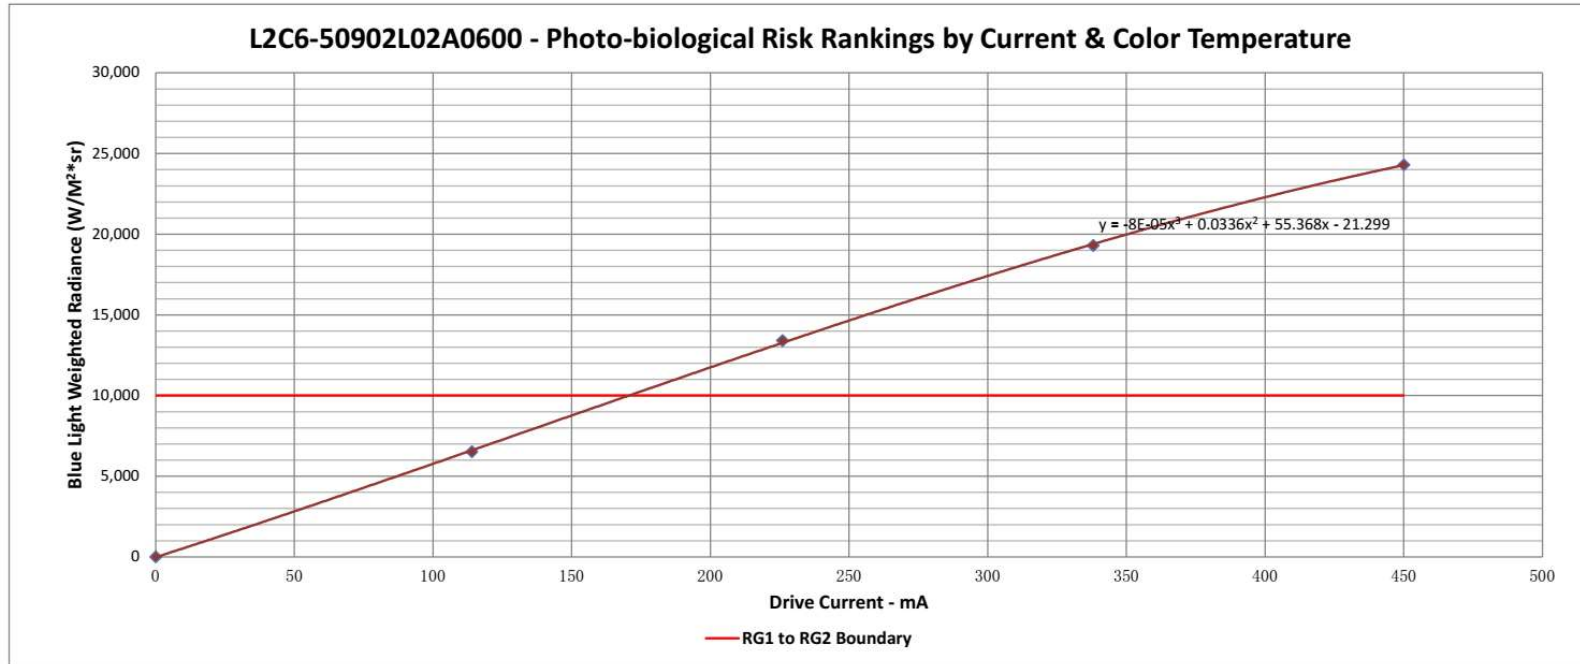

	Product ID:	Measured CCT:	Drive Currents (mA)					Regression Formula:	Fit to RG2 Line:	Current @ RG-1 to RG-2 Boundary, mA:
			0	114	226	338	450			
	L2C6-50902L02A0600	5333K	0	6520	13400	19300	24300	$y = -8E-05x^3 + 0.0336x^2 + 55.368x - 21.29$	9999	170.50

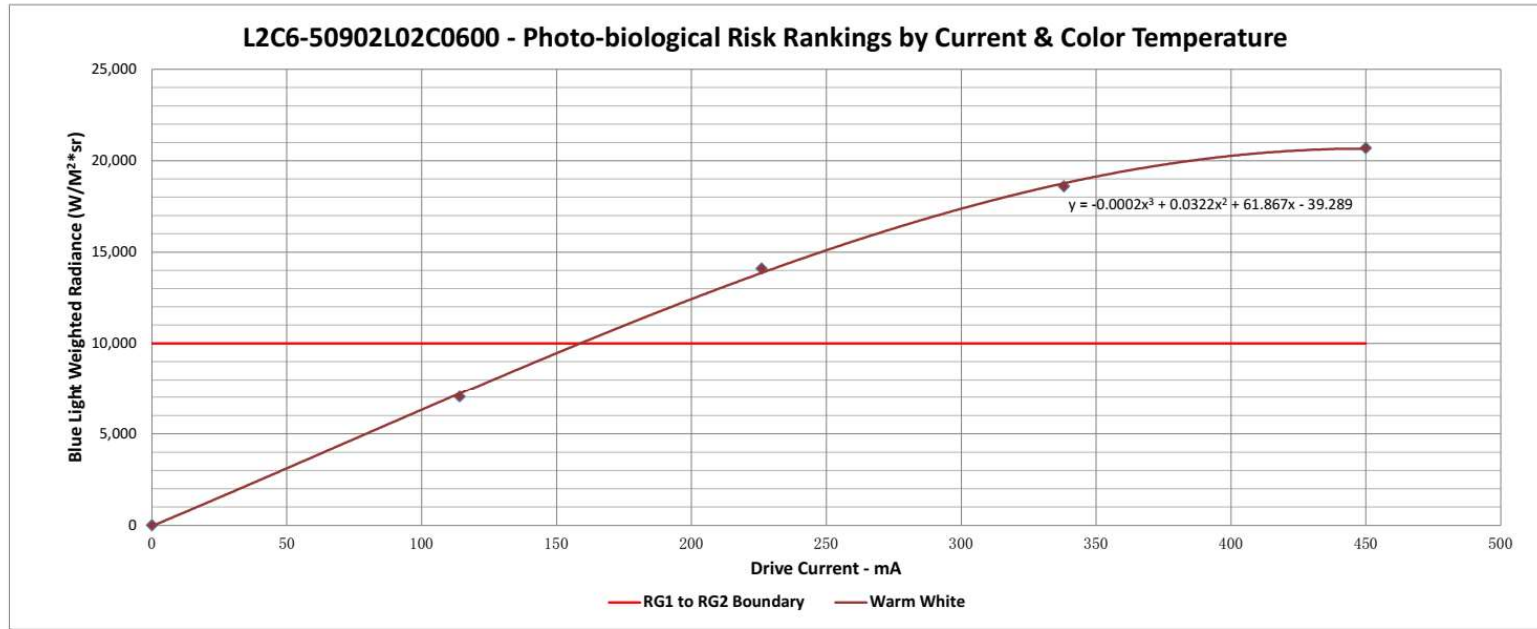

CCT Group:	Product ID:	Measured CCT:	Drive Currents (mA)					Regression Formula:	Fit to RG2 Line:	Current @ RG-1 to RG-2 Boundary, mA:
			0	114	226	338	450			
Cool White	L2C6-50902L02C0600	5136K	0	7.05E+03	1.41E+04	1.86E+04	2.07E+04	$y = -2E-04x^3 + 0.0322x^2 + 61.867x - 39.289$	9978	162

-----End-----