

**Philips Electronics Nederland B.V.**

Optical Calibrations and Measurements  
Spectroradiometry  
Mathildelaan 1, 5611 BD Eindhoven

Tel: +31 615900698 E-mail: h.stel@philips.com

Report nr : hj10373  
Date of report : 24-okt-2013  
Testfacility : EEA-622  
Operator : J.Marinus  
Responsible : H.H.Stel  
Meas type : PhotoBiological

## Photobiological safety evaluation report according to IEC 62471


Customer : Philips Lumileds Lighting Co LLC  
Address : 370 West Trimble Road San Jose, CA  
95131, USA  
Organisation : Lumileds  
Invoice Id :

**Measuring Conditions**

Spectral Range [nm] : 200-3000  
Date Of Meas : 03-sep-2013  
Burning position : Horizontal  
Meas.dist. Irradiance [mm] : 200  
Meas.dist. Radiance [mm] : 200  
Ambient temperature [°C] : 24.4

**Lamp Data**

Lamp type : LUXEON Z-LXZ1-3080  
Lamp nr : 1121 3437  
Life time [h] : 0  
Gear :  
Description : PHILIPS Lumileds Lighting Company  
BV  
Reporting distance : as measured (at 1661 lx)

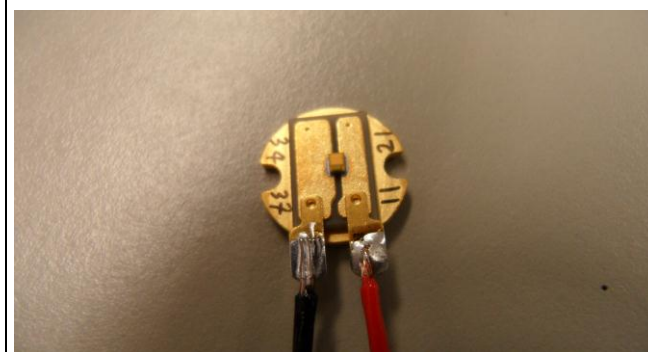**Risk Categories Found (at reporting distance)**

Hazards  
Actinic UV : Exempt  
Near UV : Exempt  
Retinal Blue SmallSrc : Exempt  
Retinal thermal : Exempt  
InfraRed Eye : Exempt  
Thermal Skin : pass

**Remarks** : LXZ1-3080 is part of the product family LUXEON Z. The sample measured, LXZ1-3080, is ANSI bin 3000K. The present classification is thus valid (worst case) for all LUXEON Z from CCT bins equal or lower than 3000K as e.g. LXZ1-2780 (see TR IEC62778).

**Signed by** : H.H.Stel

**Signature :**

Head of Photobiological safety & Irradiance

notes: RVA declaration of accreditation available at:

[http://www.rva.nl/uri/?uri=AMGATE\\_10218\\_1\\_TICH\\_R11753221190060](http://www.rva.nl/uri/?uri=AMGATE_10218_1_TICH_R11753221190060)

page 1 of 8



**Philips Electronics Nederland B.V.**  
**Optical Calibrations and Measurements**  
**Spectroradiometry**  
**Mathildelaan 1, 5611 BD Eindhoven**

Tel: +31 615900698 E-mail: h.stel@philips.com

Report nr : hj10373  
 Date of report : 24-okt-2013  
 Testfacility : EEA-622  
 Operator : J.Marinus  
 Responsible : H.H.Stel  
 Software Version : 1.5.7.0

## Photobiological safety evaluation report according to IEC 62471

Lamp Data	
Lamp type	: LUXEON Z-LXZ1-3080
Lamp nr	: 1121 3437
Life time [h]	: 0
Gear	:
Description	: PHILIPS Lumileds Lighting Company BV
Source subtense $\alpha$ [rad]	: 0.0047
Appar.Src.Size [mm]	: 0.95
Reporting distance	: as measured (at 1661 lx)

Measuring Conditions	
Spectral Range [nm]	: 200-3000
Date Of Meas	: 03-sep-2013
Ambient temperature [°C]	: 24.4
Reference plane	: optical radiating center
Azimuth, Elevation [deg]	:
Electrical setting parameter	: Lamp Current DC
Meas.dist. Irradiance [mm]	: 200
Meas.dist. Radiance [mm]	: 200



**Remarks**

Measured electrical quantities		
U lamp	: 3.194	V
I lamp	: 1.000	A
P lamp	: 3.195	W
	:	

Calculated photometric quantities (1)		
illuminance	: 1660.7	lx
Chromaticity x,y	: 0.418	0.389
Colour temperature	: 3217	K
Colour rendition avg8	: 82	

Hazards at viewing distance	Emission Level	Emission Limit for Exempt	Uncertainty Emission Level (k=2) [%]	Emission Level Unit	RiskGroup number (2)	RiskGroup	RG certainty [%] (4)	Emission Hazard Value (3)
Actinic UV	: 7.87e-9	0.001	20.1	W/m <sup>2</sup>	0	Exempt	100	0.00
Near UV	: 2.02e-4	10	5.0	W/m <sup>2</sup>	0	Exempt	100	0.00
Retinal Blue SmallSrc	: 0.672	1	4.1	W/m <sup>2</sup>	0.93	Exempt	100	0.67
Retinal thermal	: 1.2e+5	5894700	7.1	W/m <sup>2</sup> /sr	0	Exempt	100	0.02
InfraRed Eye	: < 5.9 (5)	100		W/m <sup>2</sup>	0	Exempt	100	
Thermal Skin	: < 11 (5)	3556.6		W/m <sup>2</sup>	0	pass	100	
	:							
	:							

**found:Exempt** **verdict:passed**

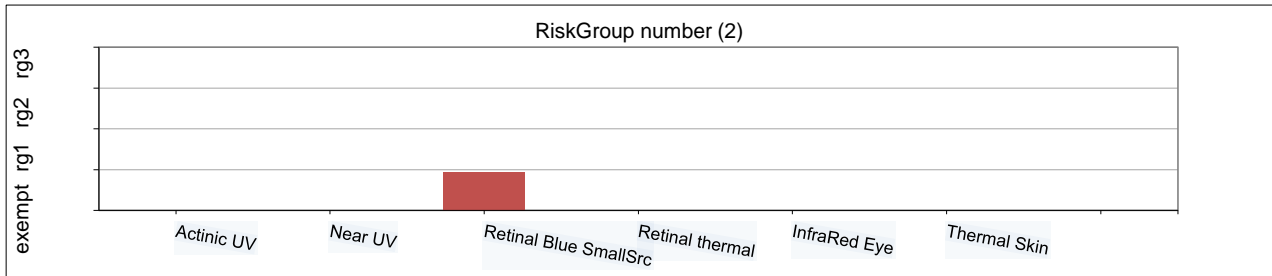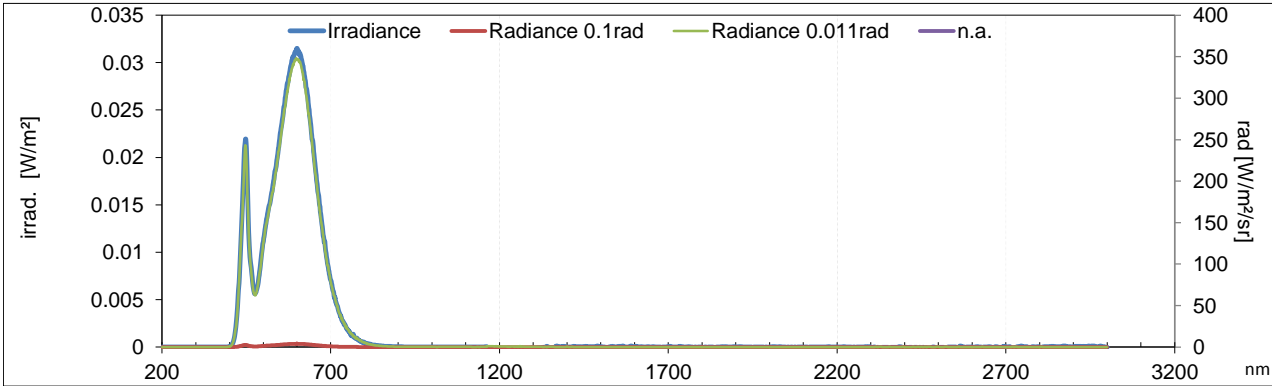

- notes :
- (1) from irradiance spectrum, for information only
  - (2) logarithmic interpolated inter Riskgroup number
  - (3) ratio 'Emission Level' / 'Emission Limit'
  - (4) Probability the Riskgroup classification is at most as indicated
  - (5) Signal below detection limit, emission level is below given value with uncertainty 3%



**Philips Electronics Nederland B.V.**  
**Optical Calibrations and Measurements**  
**Spectroradiometry**  
**Mathildelaan 1, 5611 BD Eindhoven**  
 Tel: +31 615900698 E-mail: h.stel@philips.com

Report nr : hj10373  
 Date of report : 24-okt-2013  
 Testfacility : EEA-622  
 Operator : J.Marinus  
 Responsible : H.H.Stel  
 Meas type : PhotoBiological

## Photobiological safety IEC 62471 results summary

Clause	Requirement + Test	Result - Remark	Verdict						
<b>Table 6.1</b>	Emission limits for risk groups of continuous wave lamps		Pass						
Risk	Action spectrum	Symbol	Units	Emission-Measurement					
				Exempt		Low-risk		Mod.risk	
				Result	Limit	Result	Limit	Result	Limit
Actinic UV	SUV( $\lambda$ )	$E_s$	W/m <sup>2</sup>	7.87e-9	0.001		0.003		0.03
Near UV		$E_{UVA}$	W/m <sup>2</sup>	2.02e-4	10.0		33.0		100
Retinal Blue SmallSrc*	B( $\lambda$ )	$E_B$	W/m <sup>2</sup>	0.672	1.0*		1.0		400.0
Retinal thermal	R( $\lambda$ )	$L_R$	W/m <sup>2</sup> /sr	1.2e+5	5894748	1.2e+5	5894748		14947397
InfraRed Eye		$E_{IR}$	W/m <sup>2</sup>	< 5.9 ***	100.0		570.0		3200
Thermal Skin		$E_H$	W/m <sup>2</sup>	< 11 ***	35565.6				
* Small source defined as one with $\alpha < 0.011$ radian. Averaging field of view at 10000 s is 0.1 radian ** Involves evaluation of non-GLS source. *** Signal below detection limit, emission level is below given value with uncertainty 3%									



**Philips Electronics Nederland B.V.**  
**Optical Calibrations and Measurements**  
**Spectroradiometry**  
**Mathildelaan 1, 5611 BD Eindhoven**

Tel: +31 615900698 E-mail: h.stel@philips.com

Report nr : hj10373  
 Date of report : 24-okt-2013  
 Testfacility : EEA-622  
 Operator : J.Marinus  
 Responsible : H.H.Stel  
 Meas type : PhotoBiological

**ATTACHMENT TO TEST REPORT IEC 62471**  
**EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES.**  
**Differences according to EN 62471:2008**

Clause	Requirement + Test	Result - Remark	Verdict							
<b>Table 6.1</b> Emission limits for risk groups of continuous wave lamps			Pass							
Risk	Action spectrum	Symbol	Units	Emission-Measurement						RG
				Exempt		Low-risk		Mod.risk		
				Result	Limit	Result	Limit	Result	Limit	
Actinic UV	SUV( $\lambda$ )	$E_s$	W/m <sup>2</sup>	7.87e-9	0.001		0.003		0.030	0
Near UV		$E_{UVA}$	W/m <sup>2</sup>	2.02e-4	10		33.3		100	0
Retinal Blue SmallSrc*	B( $\lambda$ )	$E_B$	W/m <sup>2</sup>		0.01 ****	0.672	1.0		400	1
Retinal thermal	R( $\lambda$ )	$L_R$	W/m <sup>2</sup> /sr	1.2e+5	5919394	1.2e+5	5919394		14886487	0
InfraRed Eye		$E_{IR}$	W/m <sup>2</sup>	< 5.9 ***	101.2		569.2		3200.9	0
Thermal Skin		$E_H$	W/m <sup>2</sup>	< 11 ***	35565.6					0
* Small source defined as one with $\alpha < 0.011$ radian. Averaging field of view at 10000 s is 0.1 radian										
** Involves evaluation of non-GLS source.										
*** Signal below detection limit, emission level is below given value with uncertainty 3%										
**** Limit for steady fixation of very small sources with angular subtense < 11 mrad. Due to eye movements during normal visual task the limit without eye stabilization is rather 1 W/m <sup>2</sup>										



**Assumptions, anomalies and warnings**

Possible product label text

Assumptions

Spatially uniform irradiance distribution (not a beam)

Continuous wave Lamp (not pulsed)

High Luminance of source ( $> 10000$  cd/m<sup>2</sup>)

Anomalies (may cause unreliable results). Results are only for information if items are listed

Warnings



**Terms and Conditions**

This evaluation report has been executed in accordance with the measurements standards as provided in the international standard CEI IEC 62471:2006 and Technical report IEC/TR 62471-2.

Deviation from the methods that are described in the standard CEI IEC 62471 will be expressed clearly in this report

On request of the customer, the reported parameters that are not defined in the standard CEI IEC 62471, will be explained by the test laboratory

This evaluation report is applicable only to the product which is unambiguously identified in the report

If the product has no identification, the test laboratory will compute and report an unique identification for the specimen tested.

The customer is at all times responsible for the (technical) information, such as optical properties, provided by him

Reproduction of the complete report is allowed. Parts of the report may only be reproduced with written approval of the test laboratory.

The test laboratory shall not hand over measurement data and evaluation report to other parties than the customer unless there is written approval of the customer

This evaluation report is issued under the restriction that the test laboratory will not be held liable for any (direct and/or consequential) damage resulting directly or indirectly from the test activities

The Raad voor Accreditatie (RvA) is a member of the European Co-operation for Accreditation (EA) and is one of the signatories to the EA multilateral Agreement and to the ILAC Mutual Recognition Arrangements (MRA) for the mutual recognition of test reports



The Dutch Accreditation Council RvA, by law appointed as  
the national accreditation body for The Netherlands,  
hereby declares that accreditation has been granted to:

**Philips Lighting B.V.  
Optical Calibrations and Measurements  
Eindhoven**

The organisation has demonstrated to be able to generate technical valid results in a  
competent way and work according to a management system.

This accreditation is based on an assessment against the requirements  
as laid down in ISO/IEC 17025:2005.

The accreditation covers the activities as specified in the authorized  
annex bearing the registration number.

The accreditation is valid provided that the organisation  
continues to meet the requirements.

The accreditation with registration number:

**L 533**

is granted on 29 August 2012

This declaration is valid until  
**1 September 2016**

The accreditation has been granted for the first time on  
**29 August 2012**

The Chief Executive

Ir. J.C. van der Poel

Annex to ISO/IEC 17025 declaration of accreditation  
for registration number: L 533



of **Philips Lighting B.V.**  
**Optical Calibrations and Measurements**  
**Eindhoven**

This annex is valid from: **29-08-2012** to **01-09-2016**


Replaces annex dated: **n.a.**

Premises: **Eindhoven**

No.	Material or product	Type of activity	Internal reference number
1	Lamps and lamp systems	Spectral, optical measurements in the wavelength range from 200 nm through 3000 nm for the evaluation of photo biological safety.	WI04 in accordance with CEI IEC 62471 and IEC/TR 62471-2 <sup>1</sup>

IEC/TR 62471-2<sup>1</sup>: with the exception of pulsed lamps and lamps systems (par. 6.2)

This annex has been approved by:

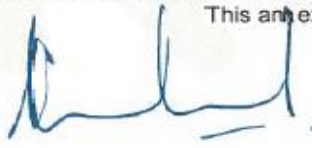

Ir. J.C. van der Poel  
Chief Executive