
	⁽¹⁾ Philips Lighting B.V. Optical Calibrations and Measurements Photobiological safety & Irradiance High Tech Campus 48, 5656 AE Eindhoven E-mail: henk.jan.van.aalderen@philips.com	⁽²⁾ Report nr : JM10461B Date of report : 13-Oct-2014 Testfacility : VarOptr Operator : H.H.Stel Responsible : P.Nederpel Meas type : PhotoBiological
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Photobiological safety evaluation report according to IEC 62471

Customer : Philips Lumileds Lighting Co LLC Address : 370 West Trimble Road San Jose CA 95131USA Organisation : LumiLeds Invoice Id :	Measuring Conditions Spectral Range [nm] : 200-3000 Date Of Meas : 23-Jun-2014 Burning position : Horizontal Meas.dist. Irradiance [mm] : 200 Meas.dist. Radiance [mm] : 200 Ambient temperature [°C] : 24.6
-------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



Lamp Data	
Lamp type	: LUXEON_3020 LED
Lamp nr	: L130_6580_1
Life time [h]	: 00/01/1900
Gear	:
Description	: PHILIPS Lumileds Lighting Company BV
Reporting distance	: 200 mm (at 731 lx)

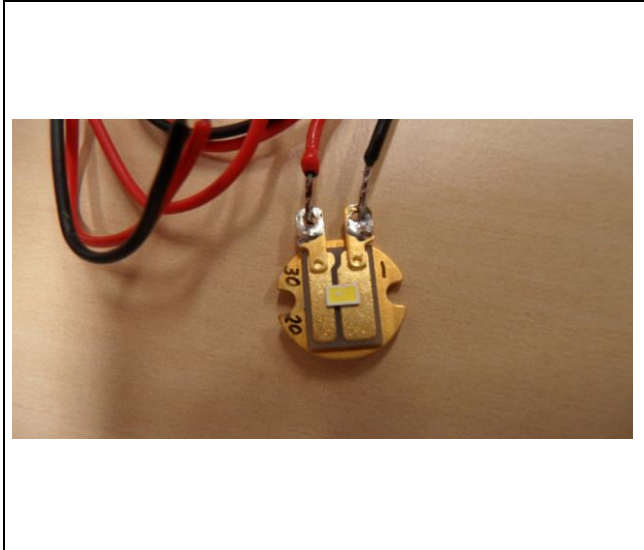

Risk Categories Found (at reporting distance)	
Hazards	
Actinic UV	: Exempt
Near UV	: Exempt
Retinal Blue SmallSrc	: Exempt
Retinal thermal	: Exempt
InfraRed Eye	: Exempt
Thermal Skin	: pass
	:

Summary of evaluated Hazards	: The product classified as Exempt based on the reported Photobiological safety tests
------------------------------	---------------------------------------------------------------------------------------

Remarks	: The measured LED, part number L130-6580002011001, is part of the LUXEON 3020 product family and is ANSI bin 6500K. The present classification is thus valid (worst case) for all LUXEON 3020 L130-xxxx002011001 from ANSI bins equal to 6500K or lower CCT (see TR IEC62778).
----------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Tested By: H.H.Stel Signatures:  Head of Photobiological safety & Irradiance	Approved By: P.Nederpel  Quality manager testing
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------

notes: (1) RVA declaration of accreditation available at: http://www.rva.nl/uri/?uri=AMGATE_10218_1_TICH_R11753221190060
 (2) This report replaces previous report issued with nr 'JM10461A'

page 1 of 8



Photobiological safety evaluation report according to IEC 62471



Lamp Data		Measuring Conditions	
Lamp type	: LUXEON_3020 LED	Spectral Range [nm]	: 200-3000
Lamp nr	: L130_6580_1	Date Of Meas	: 23-Jun-2014
Life time [h]	: 00/01/1900	Ambient temperature [°C]	: 24.6
Gear	:	Reference plane	: optical radiating center
Description	: PHILIPS Lumileds Lighting Company BV	Azimuth, Elevation [deg]	: ,
Source subtense α [rad]	: 0.0047	Electrical setting parameter	: Lamp Current DC
Appar.Src.Size [mm]	: 0.95	Meas.dist. Irradiance [mm]	: 200
Reporting distance	: 200 mm (at 731 lx)	Meas.dist. Radiance [mm]	: 200

Remarks

Measured electrical quantities		Rated		Calculated photometric quantities ⁽¹⁾	
U lamp	: 3.250	n/a	V	illuminance	: 730.5 lx (± 5.6 %)
I lamp	: 0.240	0.240	A	Chromaticity x,y	: 0.317 0.342
P lamp	: 0.780	n/a	W	Colour temperature	: 6220 K
:	:	:	:	Colour rendition avg8	: 83

Hazards at viewing distance	Emission Level	Emission Limit for Exempt	Uncertainty Emission Level (k=2) [%]	Emission Level Unit	RiskGroup number ⁽²⁾	RiskGroup	RG certainty ⁽⁴⁾ [%]	Emission Hazard Value ⁽³⁾
Actinic UV	: 3.13e-6	0.001	12.7	W/m ²	0	Exempt	100	0.00
Near UV	: 1.68e-5	10	7.8	W/m ²	0	Exempt	100	0.00
Retinal Blue SmallSrc	: 0.554	1	5.7	W/m ²	0.9	Exempt	100	0.55
Retinal thermal	: 69000	5894700	5.8	W/m ² /sr	0	Exempt	100	0.01
InfraRed Eye	: < 0.0076 ⁽⁵⁾	100		W/m ²	0	Exempt	100	
Thermal Skin	: 2.32	3556.6	5.8	W/m ²	0	pass	100	0.00
:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:

found:Exempt verdict:passed

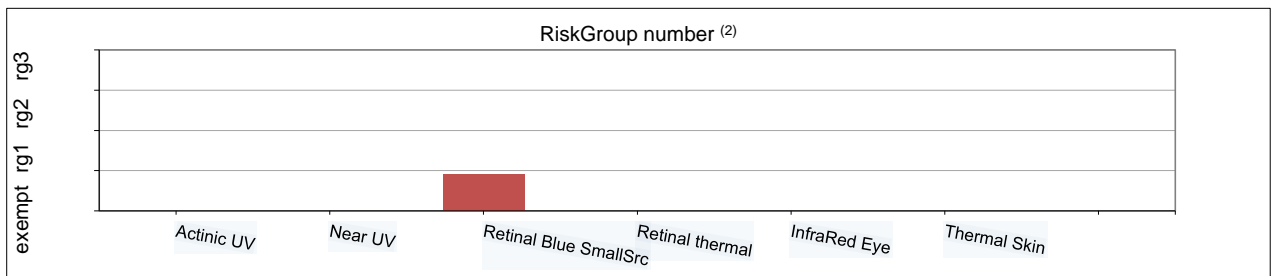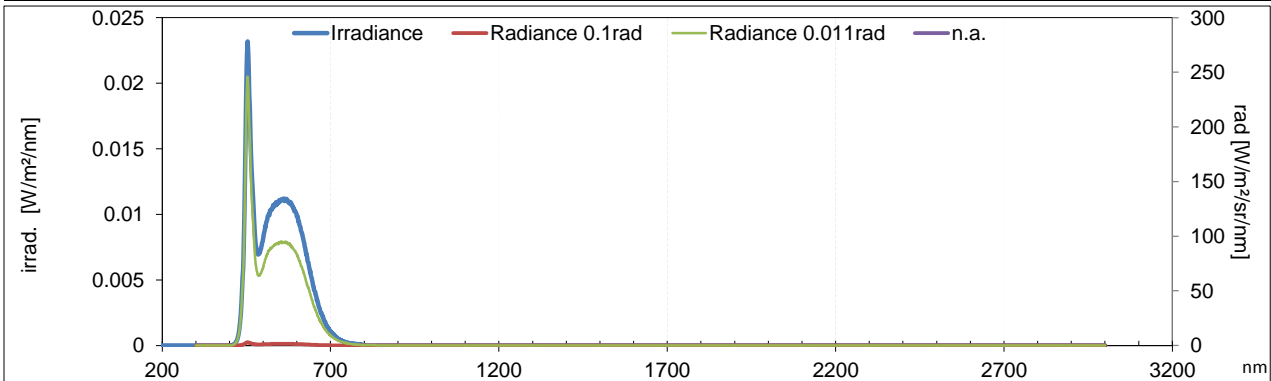

- notes :
- (1) from irradiance spectrum, for information only
 - (2) logarithmic interpolated inter Riskgroup number
 - (3) ratio 'Emission Level' / 'Emission Limit'
 - (4) Probability the Riskgroup classification is at most as indicated
 - (5) Signal below detection limit, emission level is below given value with uncertainty 3%
 - (6) This report replaces previous report issued with nr 'JM10461A'



Philips Lighting B.V.
Optical Calibrations and Measurements
Photobiological safety & Irradiance
High Tech Campus 48, 5656 AE Eindhoven
 E-mail: henk.jan.van.aalderen@philips.com

Report nr : JM10461B
 Date of report : 13-Oct-2014
 Testfacility : VarOptr
 Operator : H.H.Stel
 Responsible : P.Nederpel
 Meas type : PhotoBiological

Photobiological safety IEC 62471 results summary

Clause	Requirement + Test		Result - Remark						Verdict
Table 6.1	Emission limits for risk groups of continuous wave lamps							Pass	
Risk	Action spectrum	Symbol	Units	Exempt		Emission-Measurement		Mod.risk	
				Result	Limit	Result	Limit	Result	Limit
Actinic UV	Suv(λ)	E _s	W/m ²	3.13e-6	0.001		0.003		0.03
Near UV		E _{UVA}	W/m ²	1.68e-5	10		33		100
Retinal Blue small source	B(λ)	E _B	W/m ²	0.554	1.0*		1.0		400
Retinal thermal	R(λ)	L _R	W/m ² /sr	877	5894748	69000	5894748		14947397
InfraRed Eye***		E _{IR}	W/m ²	< 0.0076 ***	100		570		3200
Thermal Skin		E _H	W/m ²	2.32	35566				
* Small source defined as one with $\alpha < 0.011$ radian. Averaging field of view at 10000 s is 0.1 radian ** Involves evaluation of non-GLS source. *** Signal below detection limit, emission level is below given value with uncertainty 3%									



Philips Lighting B.V.
Optical Calibrations and Measurements
Photobiological safety & Irradiance
High Tech Campus 48, 5656 AE Eindhoven

E-mail: henk.jan.van.aalderen@philips.com

Report nr : JM10461B
 Date of report : 13-Oct-2014
 Testfacility : VarOptr
 Operator : H.H.Stel
 Responsible : P.Nederpel
 Meas type : PhotoBiological

ATTACHMENT TO TEST REPORT IEC 62471
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES.
Differences according to EN 62471:2008

Clause	Requirement + Test		Result - Remark							Verdict
Table 6.1	Emission limits for risk groups of continuous wave lamps									Pass
Risk	Action spectrum	Symbol	Units	Emission-Measurement						RG
				Exempt		Low-risk		Mod.risk		
				Result	Limit	Result	Limit	Result	Limit	
Actinic UV	Suv(λ)	E_s	W/m ²	3.13e-6	0.001		0.003		0.03	0
Near UV		E_{UVA}	W/m ²	1.68e-5	10		33.333		100	0
Retinal Blue small source*	B(λ)	E_B	W/m ²		0.01****	0.554	1.000		400	1
Retinal thermal	R(λ)	L_R	W/m ² /sr	877	5919394	69000	5919394		14886487	0
InfraRed Eye		E_{IR}	W/m ²	< 0.0076 ***	101.2		569.2		3200.9	0
Thermal Skin		E_H	W/m ²	2.32	35566					0
* Small source defined as one with $\alpha < 0.011$ radian. Averaging field of view at 10000 s is 0.1 radian										
** Involves evaluation of non-GLS source.										
*** Signal below detection limit, emission level is below given value with uncertainty 3%										
**** Limit for steady fixation of very small sources with angular subtense < 11 mrad. Due to eye movements during normal visual task the limit without eye stabilization is rather 1 W/m ²										

Summary of evaluated Hazards : The product classified as Riskgroup 1 based on Photobiological safety tests according to EN 62471



Assumptions, anomalies and warnings

Possible product label text

Assumptions

Spatially uniform irradiance distribution (not a beam)

Continuous wave Lamp (not pulsed)

High Luminance of source (> 10000 cd/m²)

Anomalies (may cause unreliable results). Results are only for information if items are listed

Remarks



Terms and Conditions

This evaluation report has been executed in accordance with the measurements standards as provided in the international standard CEI IEC 62471:2006 and Technical report IEC/TR 62471-2.

Deviation from the methods that are described in the standard CEI IEC 62471 will be expressed clearly in this report

On request of the customer, the reported parameters that are not defined in the standard CEI IEC 62471, will be explained by the test laboratory

This evaluation report is applicable only to the product which is unambiguously identified in the report

If the product has no identification, the test laboratory will compute and report an unique identification for the specimen tested.

The customer is at all times responsible for the (technical) information, such as optical properties, provided by him

Reproduction of the complete report is allowed. Parts of the report may only be reproduced with written approval of the test laboratory.

The test laboratory shall not hand over measurement data and evaluation report to other parties than the customer unless there is written approval of the customer

This evaluation report is issued under the restriction that the test laboratory will not be held liable for any (direct and/or consequential) damage resulting directly or indirectly from the test activities

The Raad voor Accreditatie (RvA) is a member of the European Co-operation for Accreditation (EA) and is one of the signatories to the EA multilateral Agreement and to the ILAC Mutual Recognition Arrangements (MRA) for the mutual recognition of test reports



The Dutch Accreditation Council RvA, by law appointed as the national accreditation body for The Netherlands, hereby declares that accreditation has been granted to:

**Philips Lighting B.V.
Optical Calibrations and Measurements
Eindhoven**

The organisation has demonstrated to be able to generate technical valid results in a competent way and work according to a management system.

This accreditation is based on an assessment against the requirements as laid down in ISO/IEC 17025:2005.

The accreditation covers the activities as specified in the authorized annex bearing the registration number.

The accreditation is valid provided that the organisation continues to meet the requirements.

The accreditation with registration number:

L 533

is granted on 29 August 2012

This declaration is valid until
1 September 2016

The accreditation has been granted for the first time on
29 August 2012

The Chief Executive

Ir. J.C. van der Poel

Annex to ISO/IEC 17025 declaration of accreditation
for registration number: L 533



of **Philips Lighting B.V.**
Optical Calibrations and Measurements
Eindhoven

This annex is valid from: **29-08-2012** to **01-09-2016**

Replaces annex dated: **n.a.**

Premises: **Eindhoven**

No.	Material or product	Type of activity	Internal reference number
1	Lamps and lamp systems	Spectral, optical measurements in the wavelength range from 200 nm through 3000 nm for the evaluation of photo biological safety.	WI04 in accordance with CEI IEC 62471 and IEC/TR 62471-2 ¹

IEC/TR 62471-2¹: with the exception of pulsed lamps and lamps systems (par. 6.2)

This annex has been approved by:

Ir. J.C. van der Poel
Chief Executive