


LUXEON FX Plus Cool White Gen6

Optical Rayset Readme


February 26th, 2020

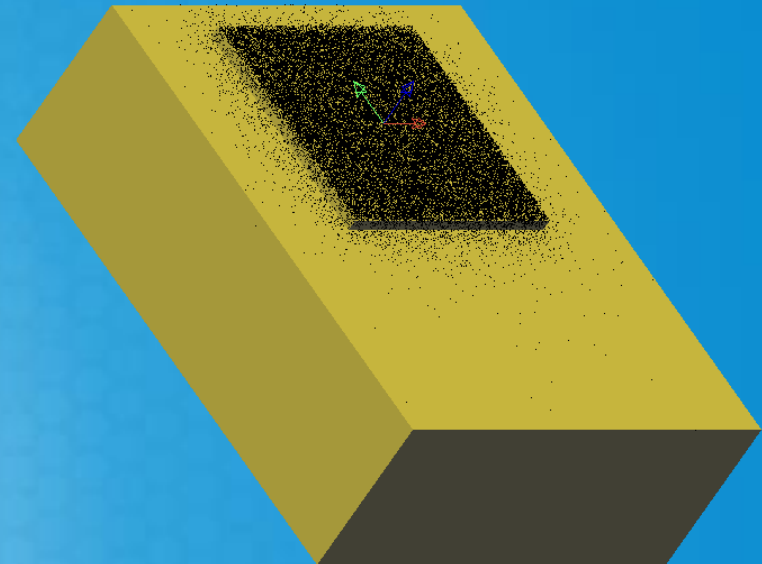


LUXEON FX Plus Cool White Gen6

Coordinate system

Top view

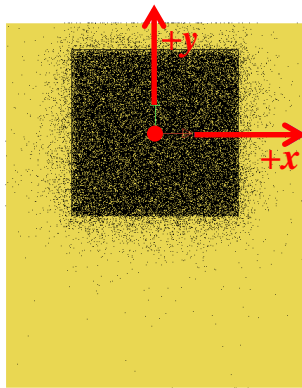

Side view

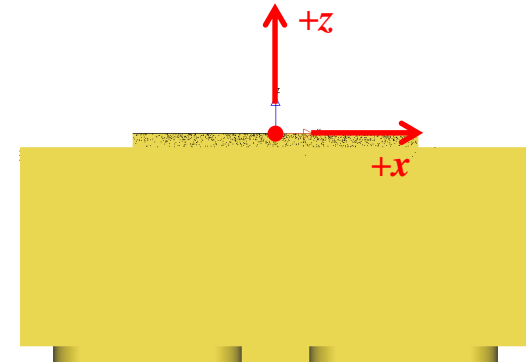


**CAD file and rayset files share the same coordinate system,
the origin is marked by the red dot in the sketches above:**

xy center == center of light emitting area
z=0 plane == top edge of light emitting area

LUXEON FX Plus Cool White Gen6

Source size

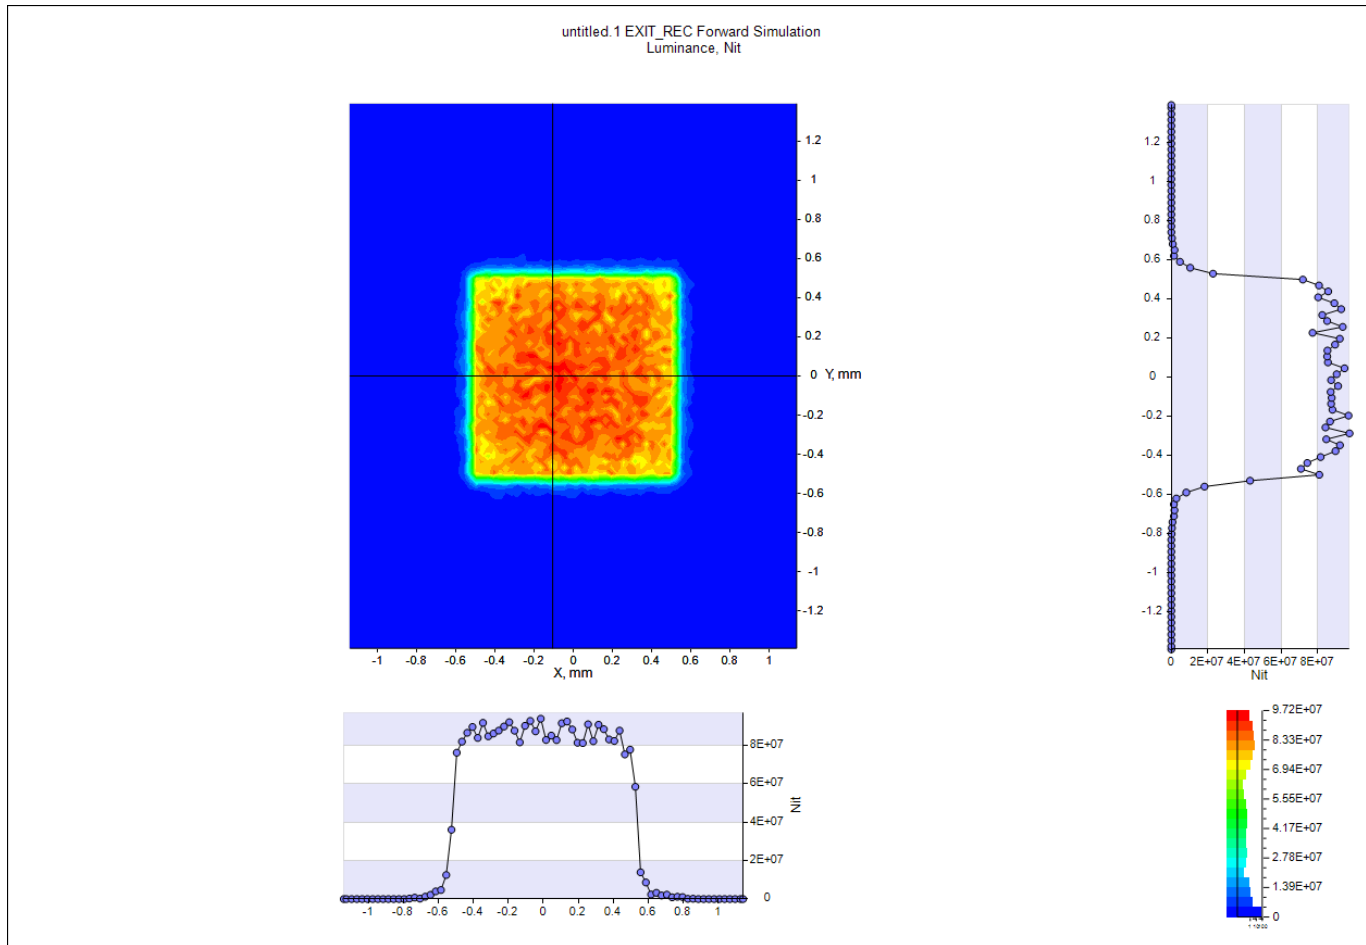


Source luminance (FWHM) = $1.05 \times 1.04 \text{ mm}^2$

The two orthogonal lines in the luminance image mark the reference planes of the two luminance cross sections.

LUXEON FX Plus Cool White Gen6

Luminous intensity distribution

Intensity per lumen over angle for vertical and horizontal slices
with lambertian cosine as reference

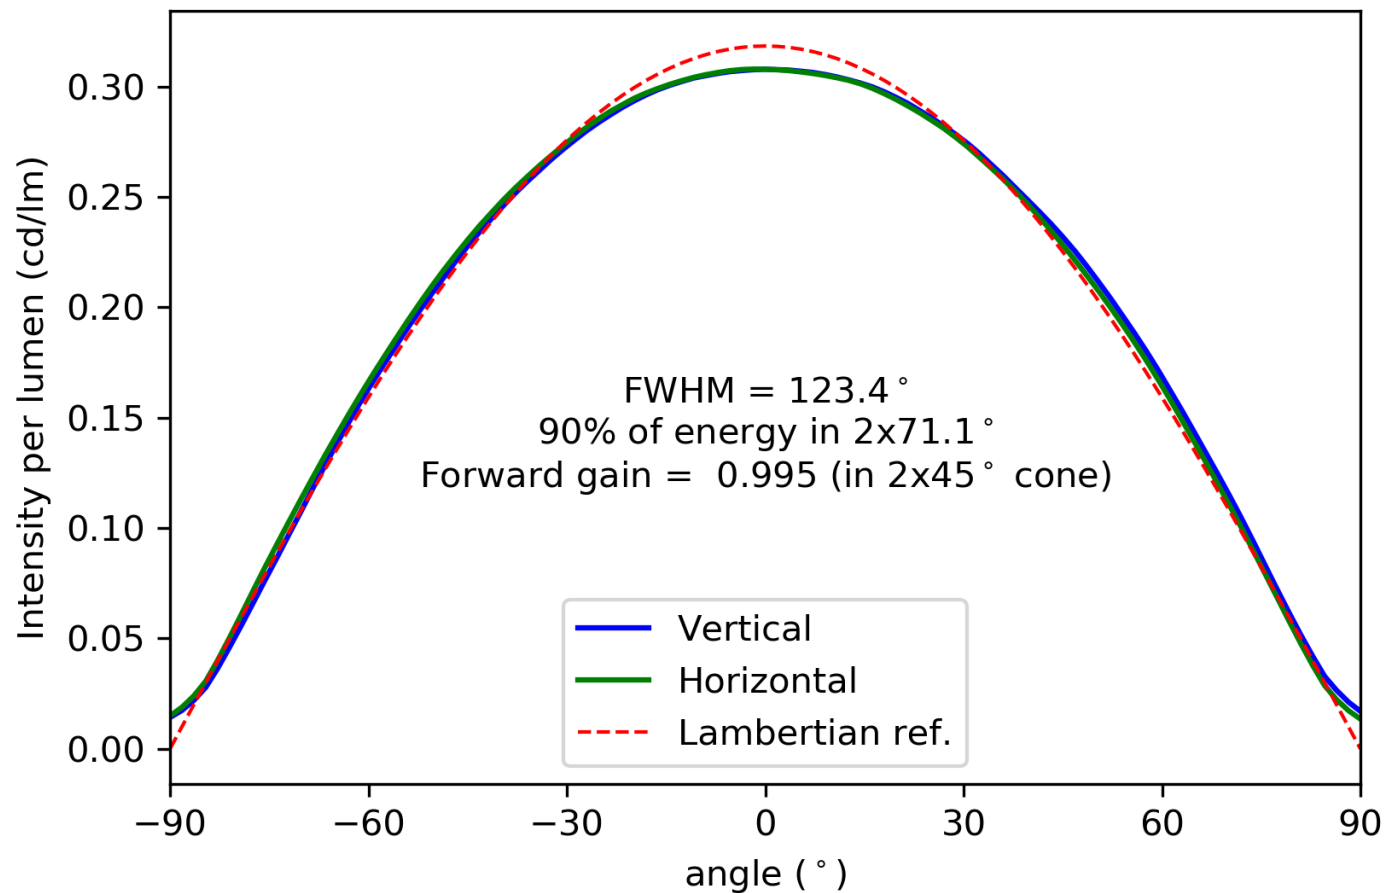

Download File Nomenclature (see next slide)

Example

LUXEON_Altilon_SMD2_1x4_gen4plus_20190206_20Mray_proj_Z_spectral_LT.ray

Product Name

Reference Date

helps identifying underlying dataset

Number of rays

e.g. 20 M = $20 \cdot 10^6$ rays

Ray starting points

'proj' indicates that ray starting points have been **projected** onto the CAD surface (---).

Spectral range

$\begin{Bmatrix} Y \\ Z \\ - \end{Bmatrix} = \begin{Bmatrix} \text{only yellow} \\ \text{only blue} \\ \text{full} \end{Bmatrix}$ spectrum taken into account



Spectral Information

$\begin{Bmatrix} \text{spectral} \\ - \end{Bmatrix} = \text{individual rays } \begin{Bmatrix} \text{do} \\ \text{don't} \end{Bmatrix} \text{ carry wavelength information}$

Target Software Package

LightTools (LT), ASAP, Zemax, ...

File Extension

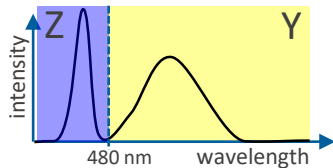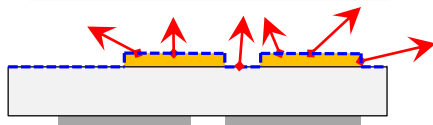

Additional Application Notes

Randomization

In some cases, reducing the number of rays in a rayset might be desirable. In order to facilitate the generation of reduced raysets, **all raysets mentioned in this readme file are randomized**. Hence, a rayset having 5 million rays (5M) can simply be generated by taking the first 5M rays from 20M rayset.


Projected Raysets: Propagated ray starting points

For projected raysets, the following procedure is applied for obtaining the starting points:

- (1) Project rays on CAD surface (---) → ray starting points
- (2) Propagate rays by 0.5 μm → propagated starting points (•)

All raysets mentioned in this readme file provide propagated starting points.

If raytracing includes the LED CAD, unpropagated rays are prone to be blocked at the surface. Rays with propagated starting points should not suffer from this problem.

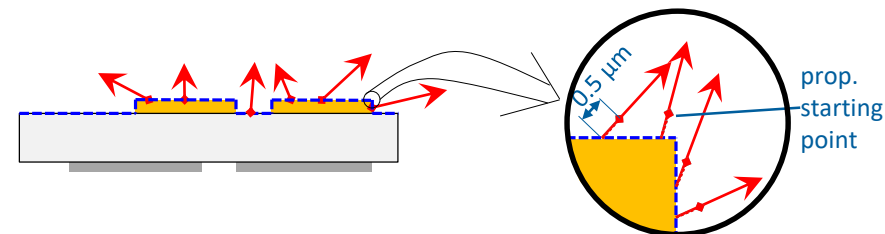

LUXEON FX Plus Cool White Gen6

Link to download folder

<https://raysets.lumileds.com/index.php/s/YrGRYMfQyMTz28A>

Files available for download

Prosource

RS8	LUXEON_FX_Plus_CW_Gen6_20200226_1264.rs8	577 MB
-----	--	--------

LightTools

Spectral Projected	LUXEON_FX_Plus_CW_Gen6_20200226_40MRays_proj_spectral_LT.ray	1.19 GB	40MRays
Y-Component Projected	LUXEON_FX_Plus_CW_Gen6_20200226_20MRays_proj_Y_LT.ray	533 MB	20MRays
Z-Component Projected	LUXEON_FX_Plus_CW_Gen6_20200226_20MRays_proj_Z_LT.ray	532 MB	20MRays

ASAP & LucidShape

Y-Component Projected	LUXEON_FX_Plus_CW_Gen6_20200226_20MRays_proj_Y_ASAP.dis	533 MB	20MRays
Z-Component Projected	LUXEON_FX_Plus_CW_Gen6_20200226_20MRays_proj_Z_ASAP.dis	532 MB	20MRays

OPTIS SPEOS

Y-Component Spectral Projected	LUXEON_FX_Plus_CW_Gen6_20200226_20MRays_proj_Y_spectral_Speos.ray	609 MB	20MRays
Z-Component Spectral Projected	LUXEON_FX_Plus_CW_Gen6_20200226_20MRays_proj_Z_spectral_Speos.ray	608 MB	20MRays

Zemax

Spectral Projected	LUXEON_FX_Plus_CW_Gen6_20200226_40MRays_proj_spectral_zemax.dat	1.19 GB	40MRays
--------------------	---	---------	---------

Far Field

IES	LUXEON_FX_Plus_CW_Gen6_20200226_40MRays.ies	10.6 kB
-----	---	---------

Spectrum


Spectrum	LUXEON_FX_Plus_CW_Gen6_20200226_spectrum.txt	17.4 kB
----------	--	---------

CAD

STEP	LUXEON_FX_Plus_CW_Gen6_20200226_geometry.STEP	85.0 kB
IGES	LUXEON_FX_Plus_CW_Gen6_20200226_geometry.IGS	191 kB


LUXEON FX Plus Cool White Gen6

3D CAD view + ray starting points

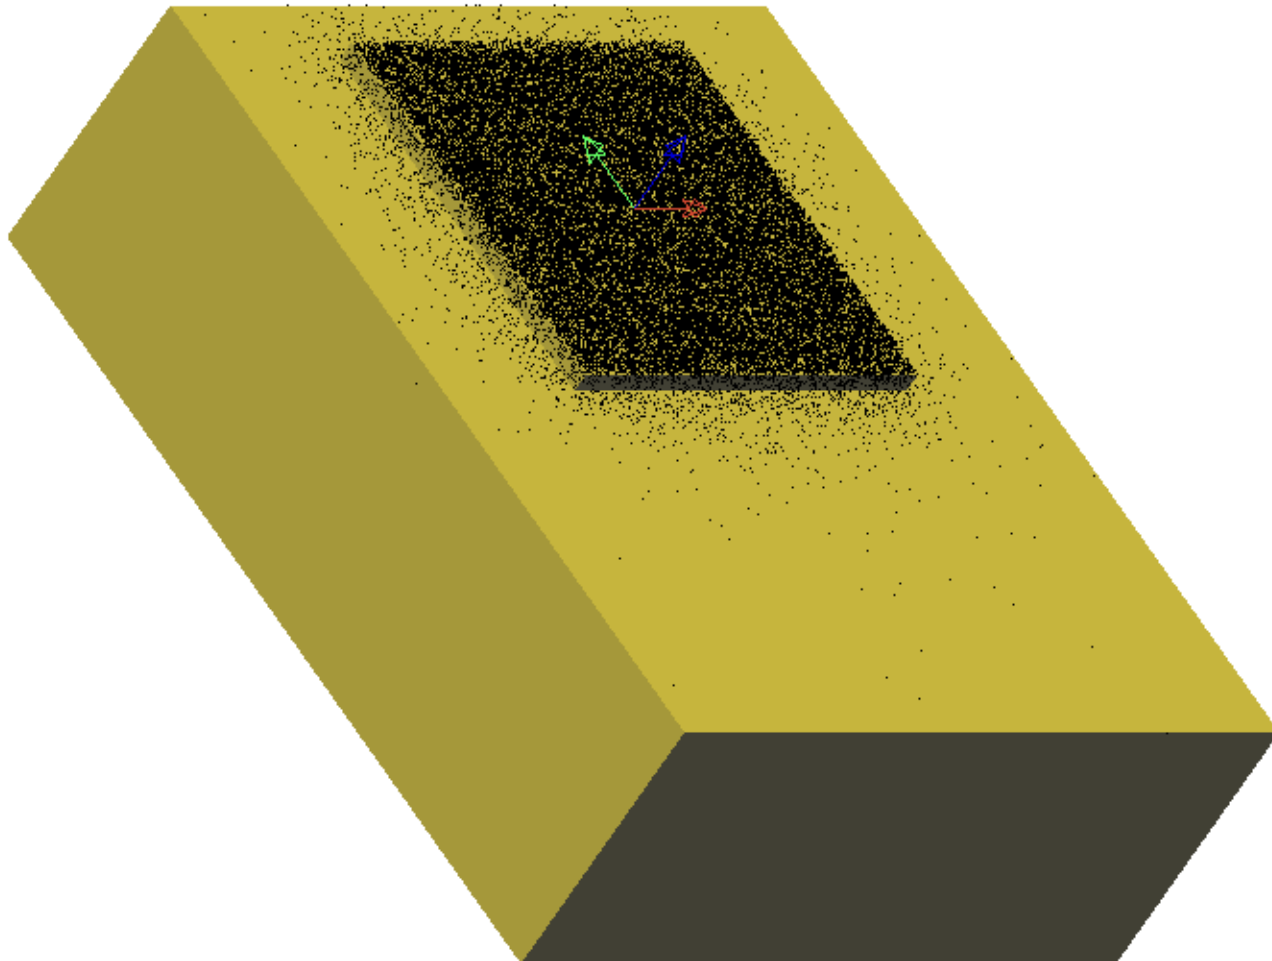


LUXEON FX Plus Cool White Gen6

Illuminance color chart (color over position)

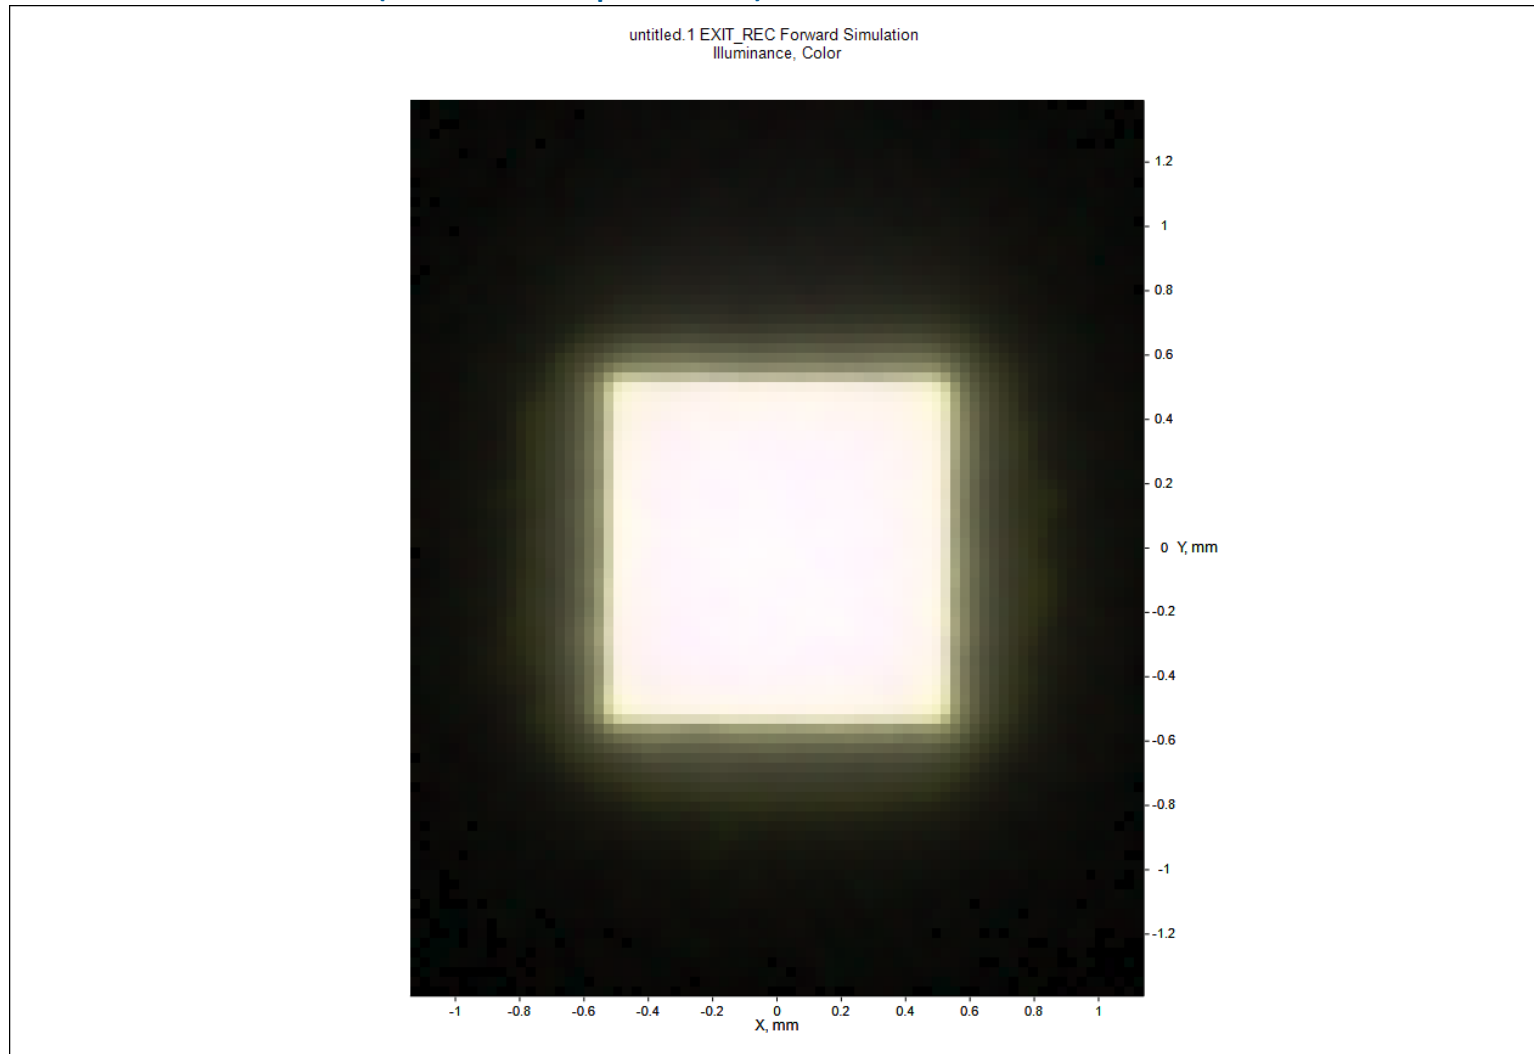

LUXEON FX Plus Cool White Gen6

Measured spectrum split in blue (Z) and yellow (Y) components

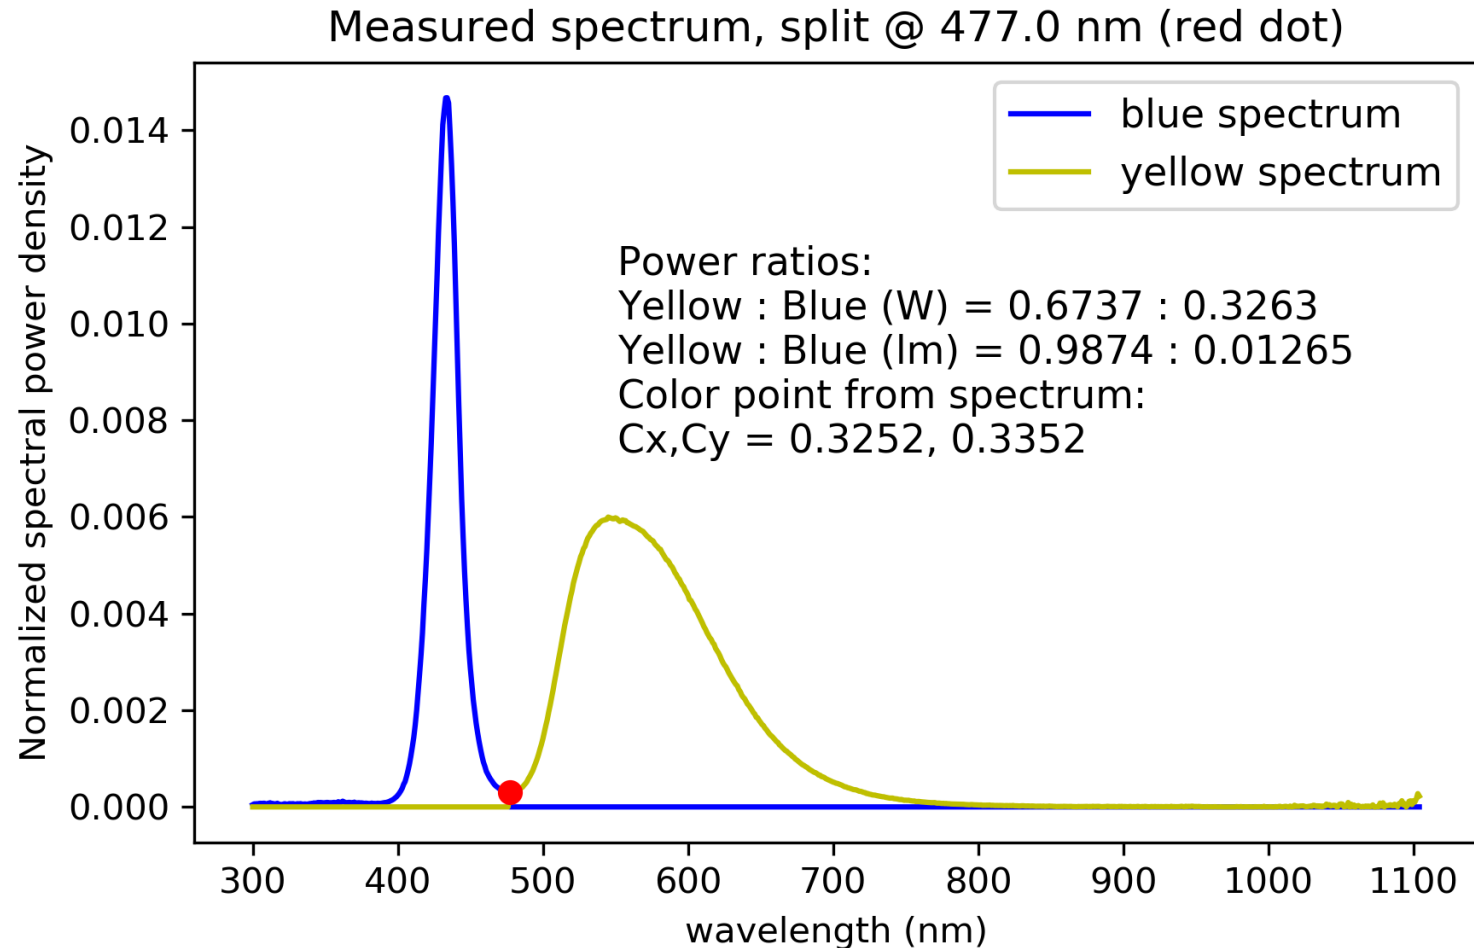

LUXEON FX Plus Cool White Gen6

Color data info

Parameter	Value
yellow : blue ratio (W) (from measured spectrum)	0.6737 : 0.3263
yellow : blue ratio (lm) (from measured spectrum)	0.9874 : 0.01265
Average color point Cx, Cy (from measured spectrum)	0.3252, 0.3352
Average color point Cx, Cy (from simulation)	0.3251, 0.337
Color point Cx, Cy @ HV (from simulation)	0.3211, 0.3298
Average CCT (K) (from simulation)	5.84e+03

Lumileds ref.: 1264_LUXEON FX Plus Cool White Gen6_20200226



Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided “as is,” and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the use of the provided materials, information and data. A listing of Lumileds product/patent coverage may be accessed at lumileds.com/patents.